OPERATIONS

Wikciup Water District, Oregon

2013. North Clackamas County Water Commission, OR. SSF Cleaning
(photo taken by Chris Johnsen, NCCWC)

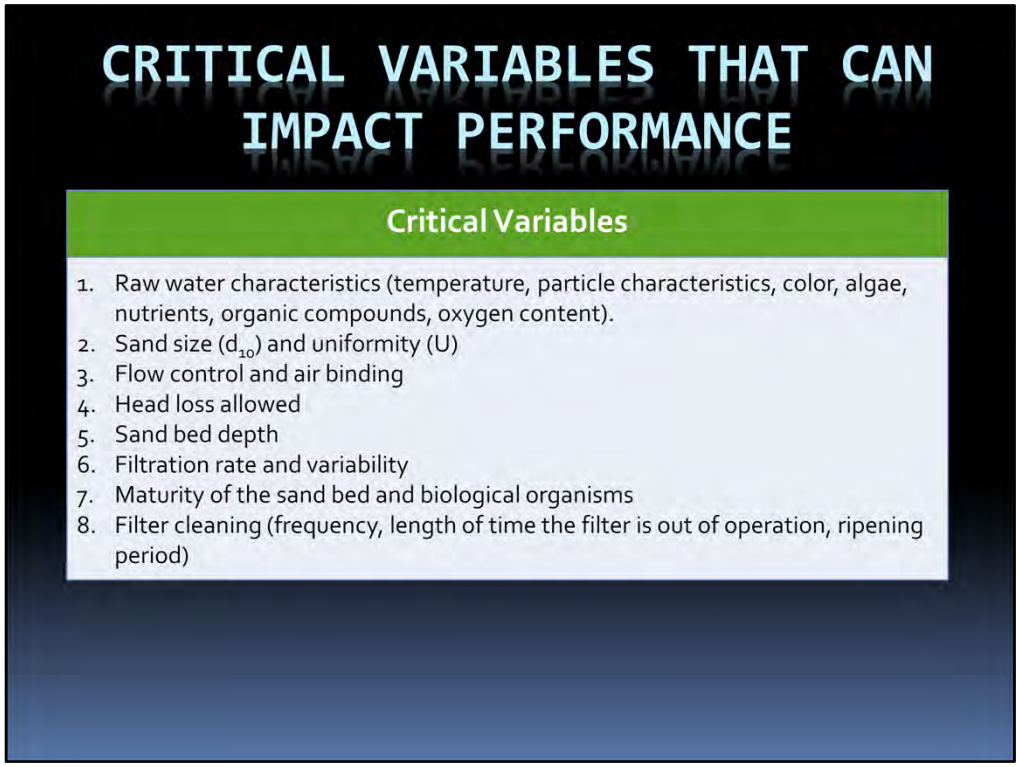

As previously mentioned, there are a number of variables that can have a big impact on performance. This segment will touch on the operation and maintenance of slow sand filters.

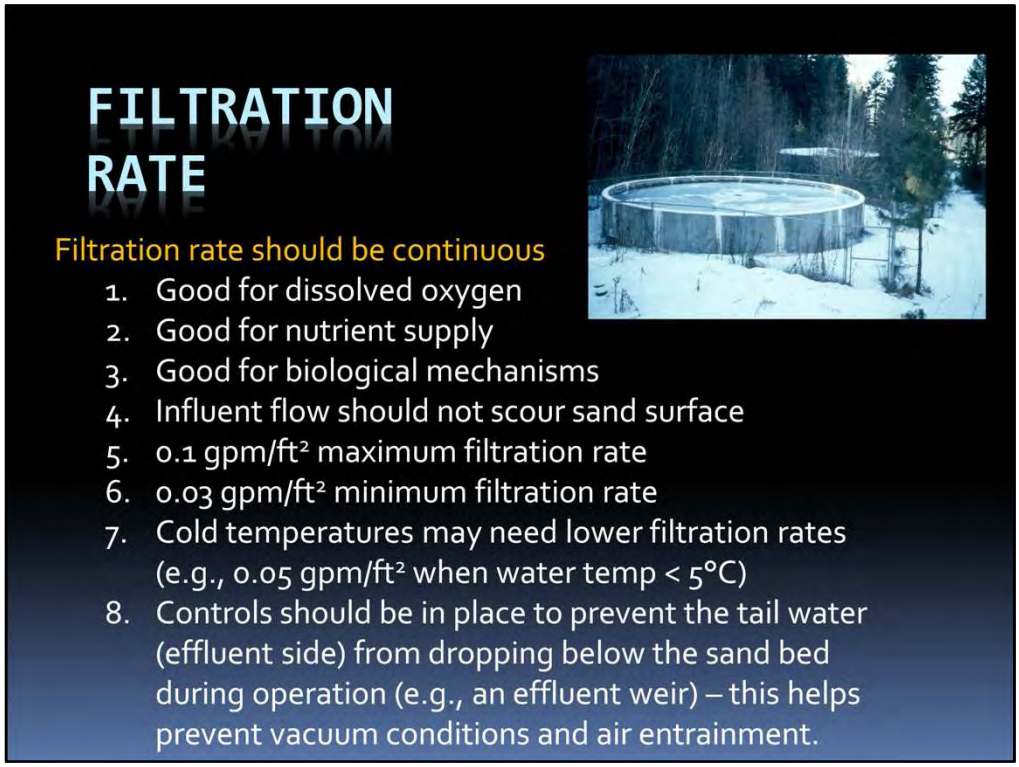

The filtration rate should be continuous with rate changes needed to accommodate system demands made gradually over a period of several days or weeks. Operating this way keeps a constant supply of nutrients and dissolved oxygen needed for healthy biological activity. Filtration rates should not exceed 0.1 gpm/ft^2 and should not drop below 0.03 gpm/ft^2.

FLOW CONTROL – INLET VS OUTLET

Flow control can be practiced at the inlet or outlet.

1. Outlet flow is controlled with a valve at the outlet, which must be adjusted frequently, often daily, or output will fall. This ensures the maximum retention of water even at the beginning of a filter run. This method is the most common and maximizes treatment efficiency but increases operator involvement.

2. Inlet flow control can be accomplished by a gate valve plus V-notch weir. As the resistance of the filter bed increases, the water level rises. When it reaches the overflow pipe the bed should be cleaned. Inlet flow control requires less operator involvement but decreases filter efficiency slightly.

Outlet flow control is accomplished with the use of an effluent valve, which must be adjusted as the filter plugs resulting in less effluent flow, in order to meet system demands. Inlet flow control is accomplished by a gate valve plus a V-notch weir. As the filter plugs, the headwater level rises to the level of the overflow pipe. At this point the filter must be cleaned, or effluent flows will begin to drop off.

FLOW MEASUREMENTS

Flow can be measured using weirs (square, v-notch), orifice plates, or flow meters.

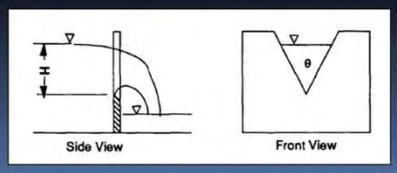

Flow calculation for V-notch weir with a 60 degree angle:

$$Q = 1.44\ H^{5/2}$$

Where:
Q = ft^3/second
H = height of water level above weir crest (ft)

Outlet flow measurements can be made whether using weirs, orifice plates, or flow meters.

FLOW MEASUREMENTS

Flow calculation for rectangular weir:

$Q = C_w * (2*g)^{0.5} * b * H^{3/2}$

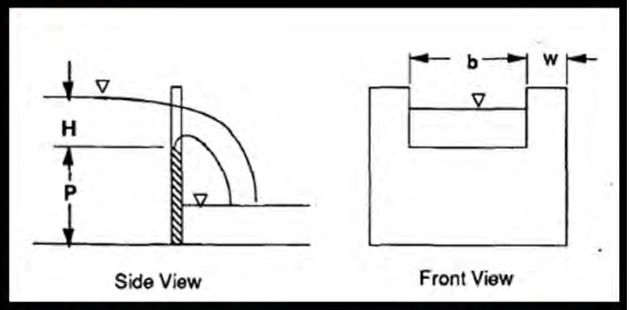

Where:

$Q = ft^3/second$
H = height of water level above weir crest (ft)
$g = 32.2\ ft/s^2$ (gravity)
b = length of weir crest (ft)
C_w = weir coefficient where $C_w = 0.40 + (0.05 * (H/P))$ where P = distance in feet from floor of channel to weir crest

This is the formula for flow measurements made from a rectangular weir.

FLOW MEASUREMENTS

Rectangular weir flow determinations:

Flow calculations for rectangular weir – Yellow cells indicate acceptable range of filtration rates from 0.03 – 0.1 gpm/ft² (with unit conversions for H & P in inches and Q in gpm, MGD, or gpm/ft²)

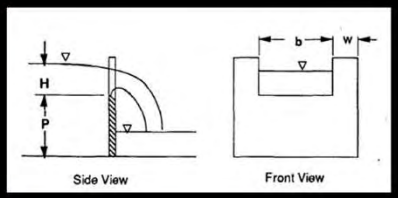

$Q = C_w * (2*g)^{0.5} * b * H^{3/2}$ $C_w = 0.40 + (0.05 * (H/P)$

Weir Parameters			Q (gpm)			Q (MGD)			Q (gpm/ft²) w/ 1,000 ft² Filter Area		
H (inches)	P (in)	C_w (ft³/s)	b = 1 ft	b = 2 ft	b = 3 ft	b = 1 ft	b = 2 ft	b = 3 ft	b = 1 ft	b = 2 ft	b = 3 ft
0.25	72	0.4002	4.3	8.7	13.0	0.006	0.012	0.019	0.004	0.009	0.013
0.5	72	0.4003	12.3	24.5	**36.8**	0.018	0.035	**0.053**	0.012	0.025	**0.037**
0.75	72	0.4005	22.5	**45.1**	**67.6**	0.032	**0.065**	**0.097**	0.023	**0.045**	**0.068**
1	72	0.4007	**34.7**	**69.4**	**104.1**	**0.050**	**0.100**	**0.150**	**0.035**	**0.069**	**0.104**
1.25	72	0.4009	**48.5**	**97.1**	145.6	**0.070**	**0.140**	0.210	**0.049**	**0.097**	0.146
1.5	72	0.4010	**63.8**	127.7	191.5	**0.092**	0.184	0.276	**0.064**	0.128	0.192
1.75	72	0.4012	**80.5**	160.9	241.4	**0.116**	0.232	0.348	**0.080**	0.161	0.241
2	72	0.4014	**98.4**	196.7	295.1	**0.142**	0.283	0.425	**0.098**	0.197	0.295

This table shows flow measurements made using the formula for a rectangular weir. Some of the unit conversions have been incorporated into the results (e.g., H & P in inches rather than feet and Q in gpm or MGD rather than ft³/second).

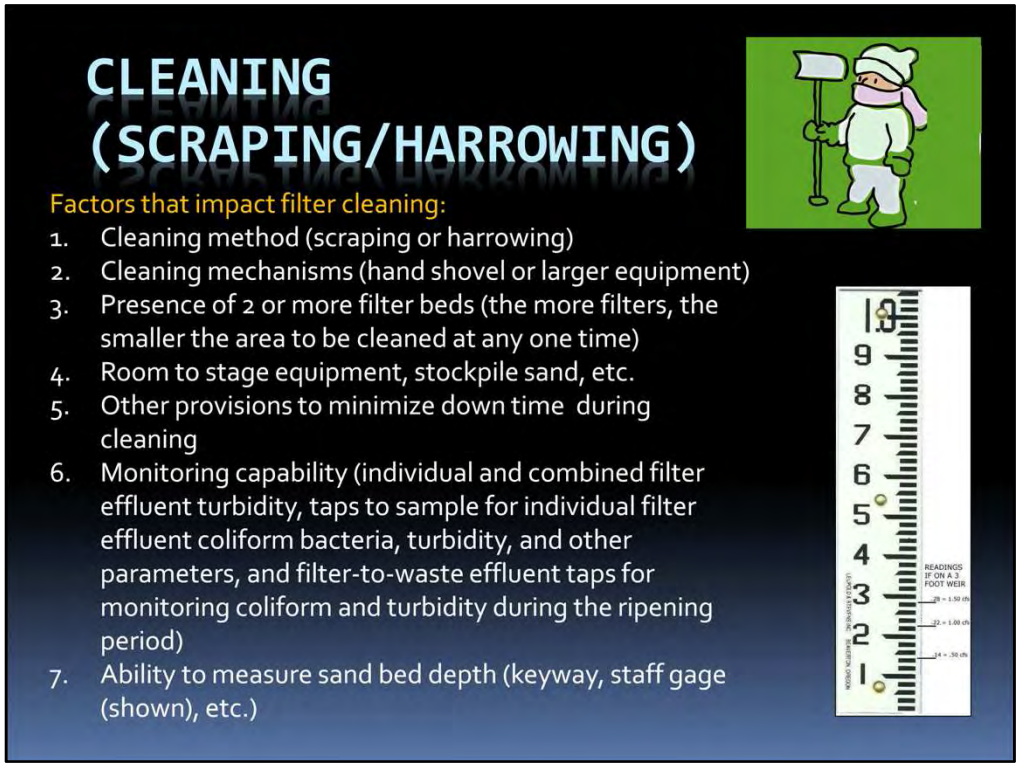

Many factors impact effective cleaning. Cleaning can be accomplished by scraping or harrowing and can be done either by hand or using machines, depending upon the size of the beds. Either way, cleaning efforts should strive to minimize the time a filter is off-line, which is facilitated by the presence of a sufficient number of filters, which not only provides for redundancy, but also reduces the size of the filter area to be cleaned at any one time. Access to the filter beds is dictated by the cleaning method. Storage should also be provided for equipment and stockpiled sand. Ideally, the design should include on-line instrumentation to monitor individual and combined filter effluent turbidity as well as providing taps for sampling of filter-to-waste water for determining when a newly cleaned filter is ready to be put back into service. Provisions should also exist to determine how much sand is remaining in the filter bed, which is typically reduced with each cleaning.

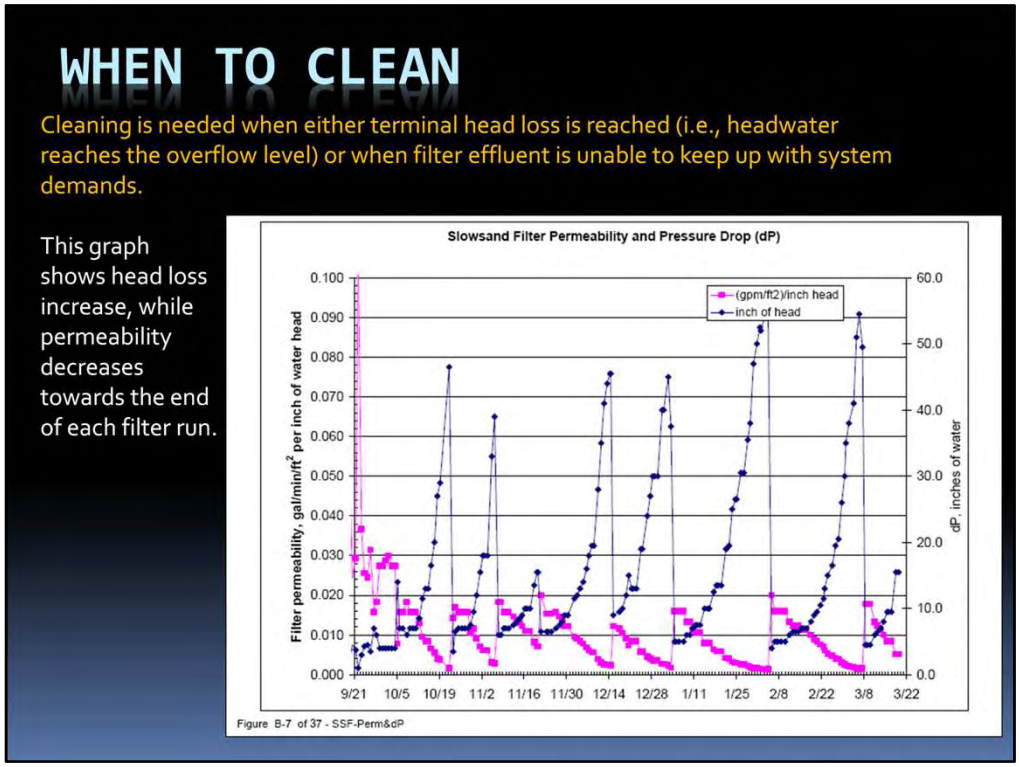

Cleaning is needed when either terminal head loss is reached or when filter effluent is unable to keep up with system demands. This graph shows head loss increase, while permeability decreases towards the end of each filter run. This graph is from the Bureau of Reclamation's August 2000 report entitled *Alternatives for Using Central Arizona Project Water in the Northwest Tucson Area*.

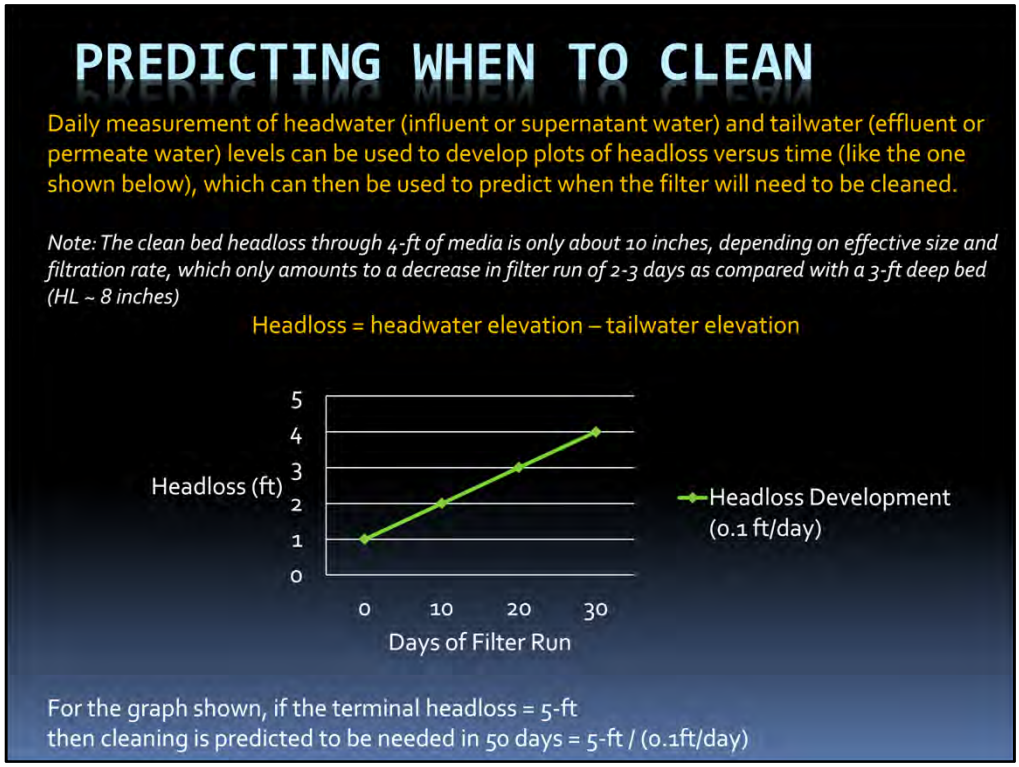

Daily measurement of headwater and tailwater levels can be used to develop plots of headloss versus time, which can then be used to predict when the filter will need to be cleaned.

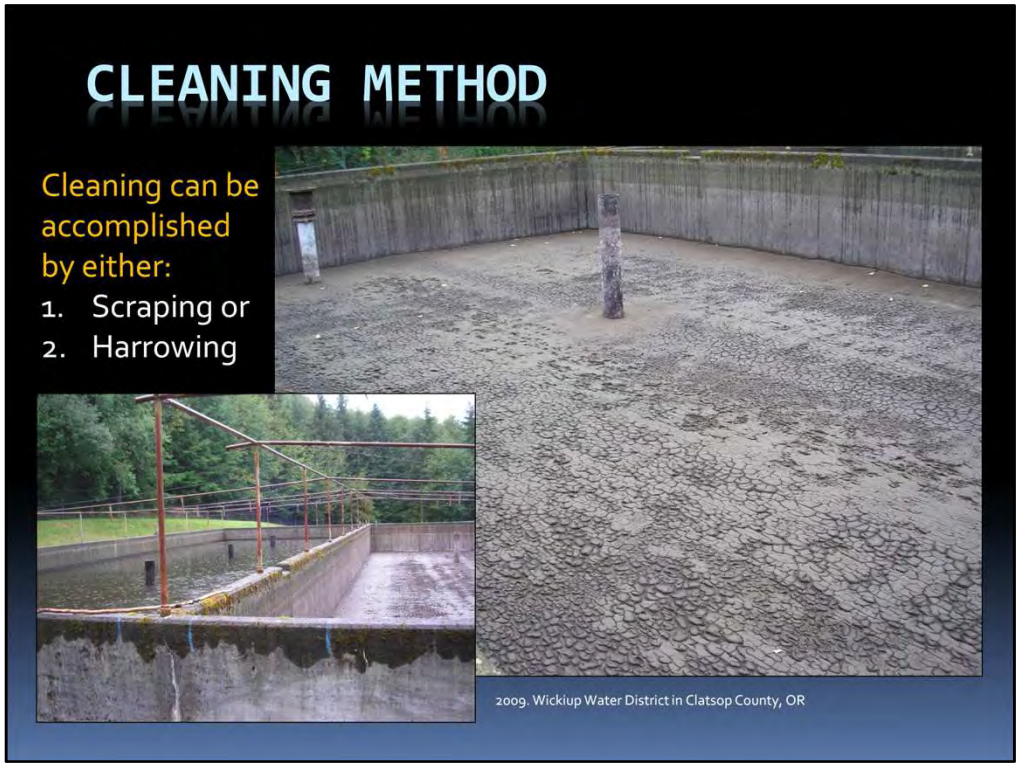

When the filter becomes clogged and effluent flows can no longer meet system demands, the filters must be cleaned. One method is to scrape the schmutsdecke and clogged portion of the sand off. The other method is wet harrowing. This photo shows a filter for the Wickiup Water District located in Clatsop County, Oregon drained and ready to be scraped.

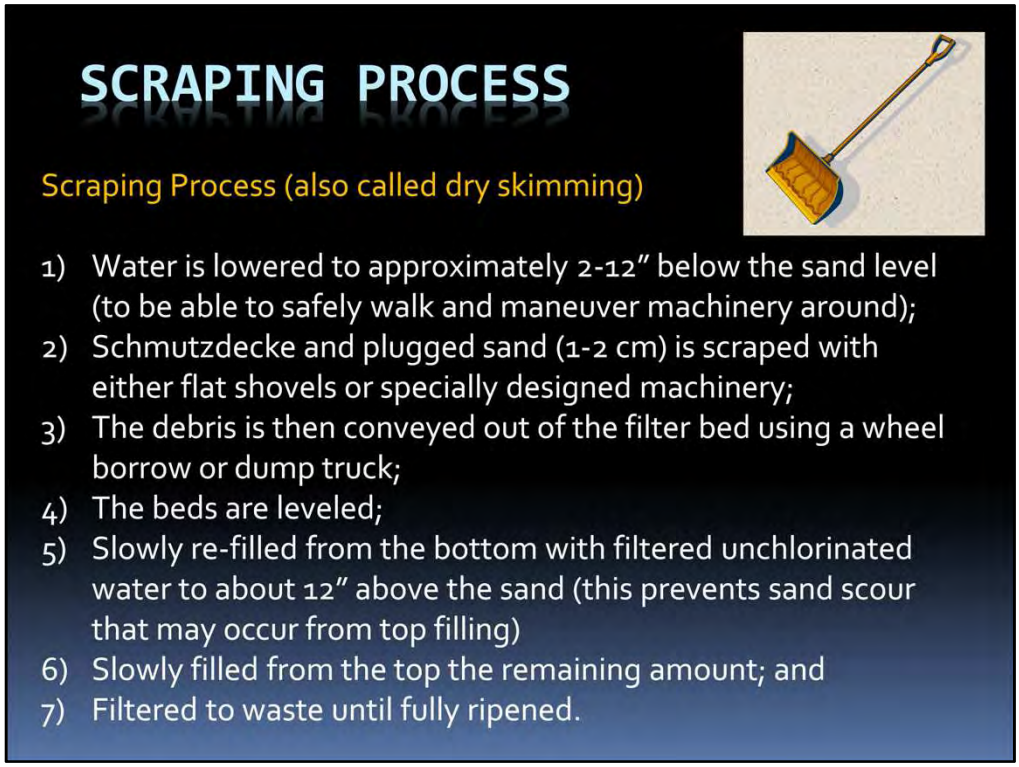

When the filters are cleaned by scraping (or dry skimming) Water is lowered to approximately 2 feet below the sand level and scraped with either flat shovels or specially designed machinery. The debris is then conveyed to a wheel borrow or dump truck. The beds are leveled, re-filled, and filtered to waste until fully ripened.

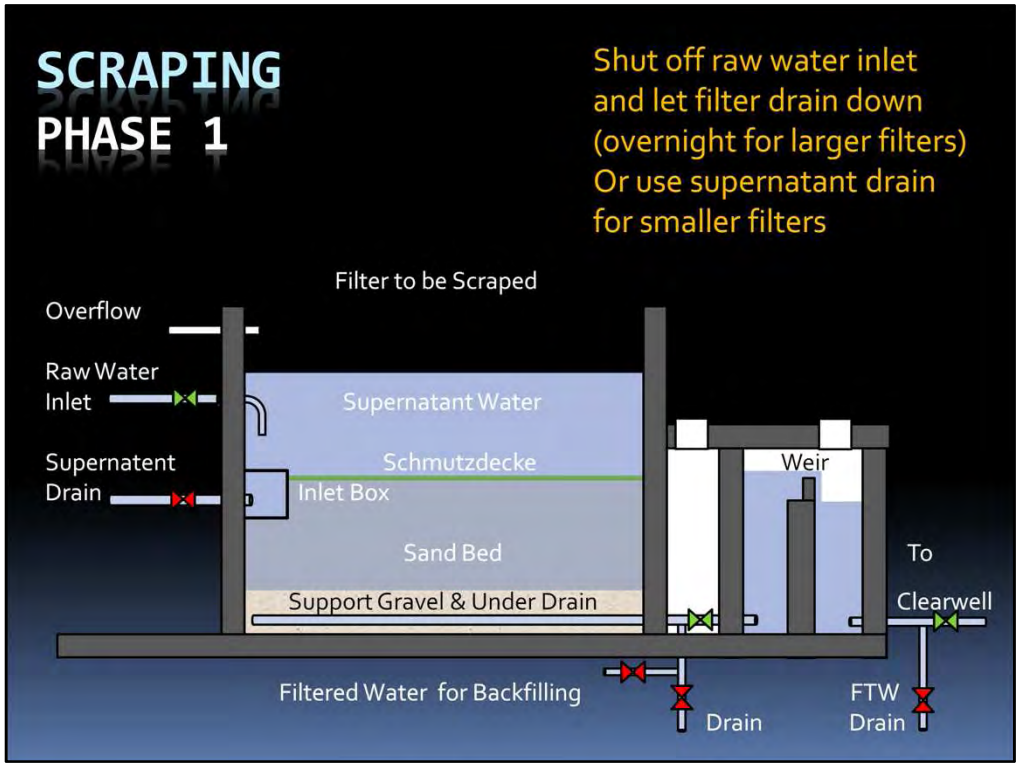

The first phase in scraping a filter is to shut off raw water inlet and let filter drain down (overnight for larger filters) or use the supernatant drain for smaller filters.

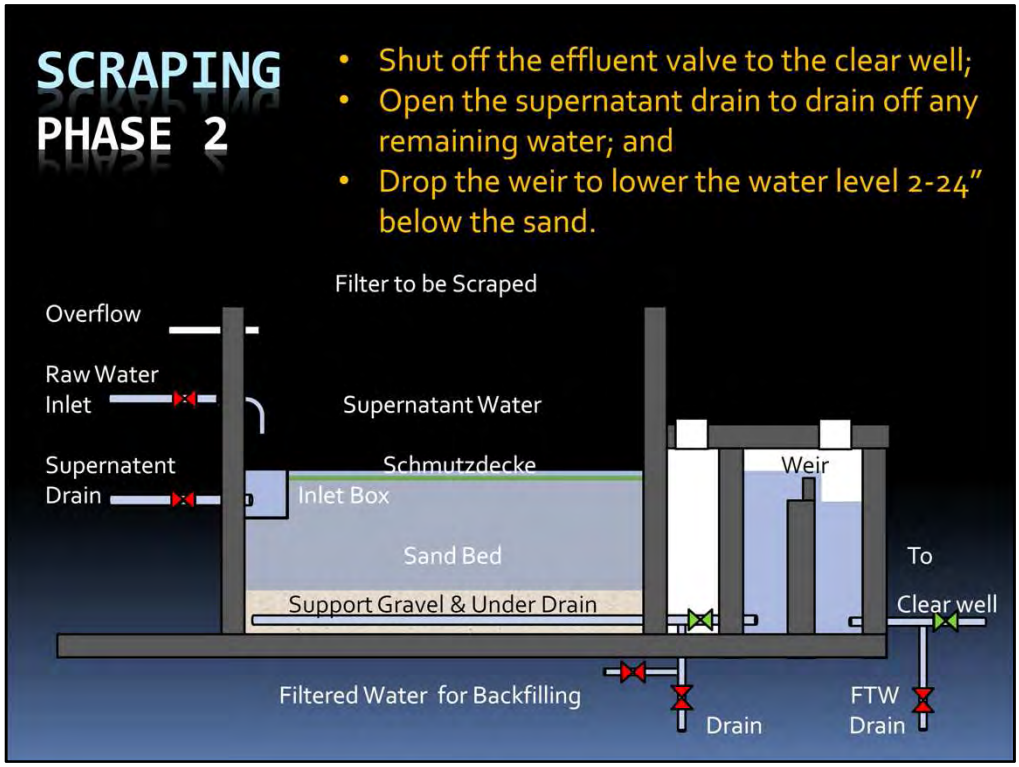

The next step is to shut off the effluent valve to the clear well, open the supernatant drain to drain off any remaining water and drop the weir to lower the water level 2-24" below the sand.

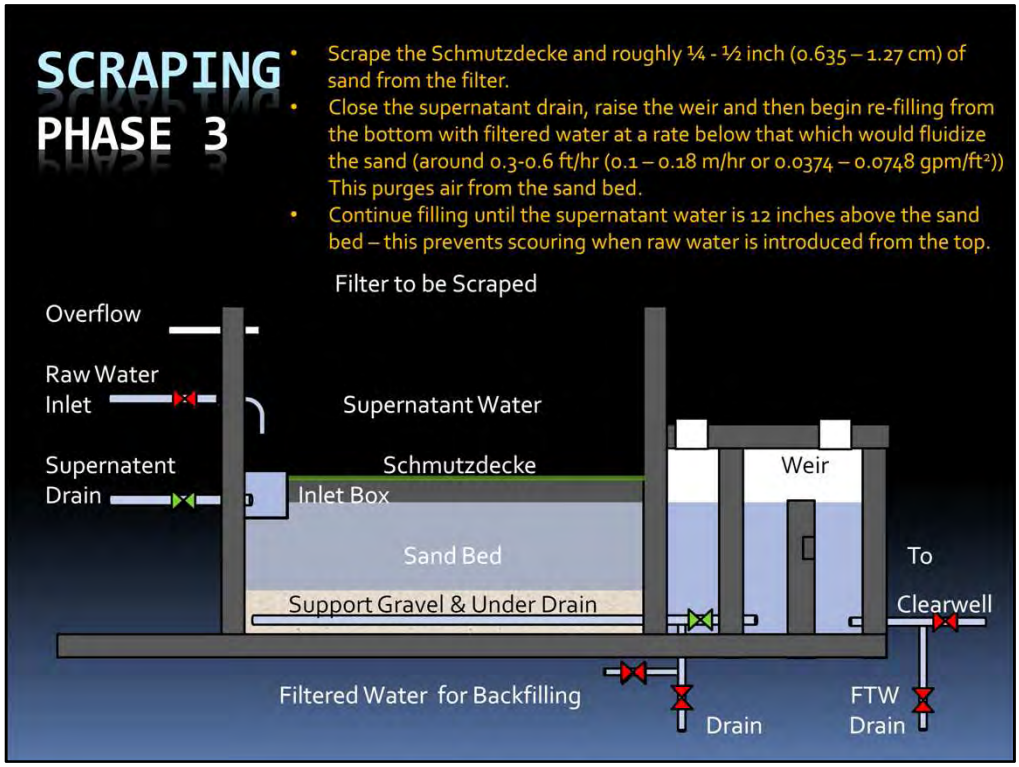

Then the following steps are carried out:

- Scrape the Schmutzdecke and roughly ¼ - ½ inch (0.635 – 1.27 cm) of sand from the filter.
- Close the supernatant drain, raise the weir and then begin re-filling from the bottom with filtered water at a rate below that which would fluidize the sand (around 0.3-0.6 ft/hr (0.1 – 0.18 m/hr or 0.0374 – 0.0748 gpm/ft^2)) This purges air from the sand bed.
- Continue filling until the supernatant water is 12 inches above the sand bed – this prevents scouring when raw water is introduced from the top.

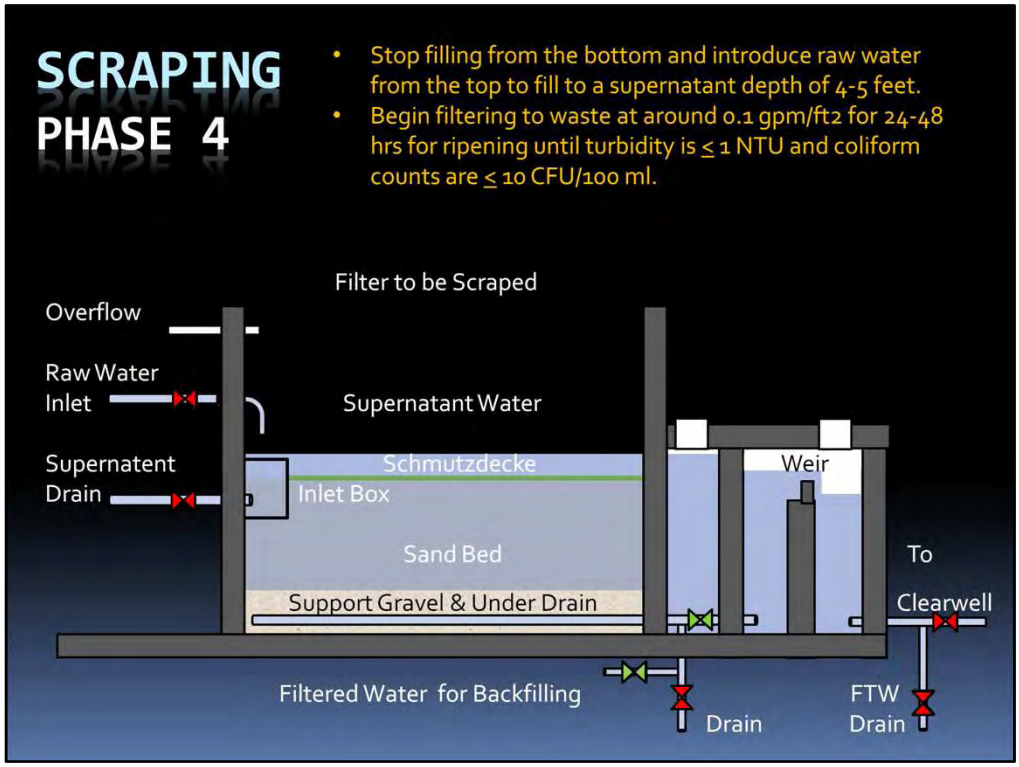

Once filling from the bottom is stopped, raw water is introduced from the top to fill to a supernatant depth of 4-5 feet. The filtered is then filtered to waste at around 0.1 gpm/ft^2 for 24-48 hrs for ripening until turbidity is ≤ 1 NTU and coliform counts are ≤ 10 CFU/100 ml.

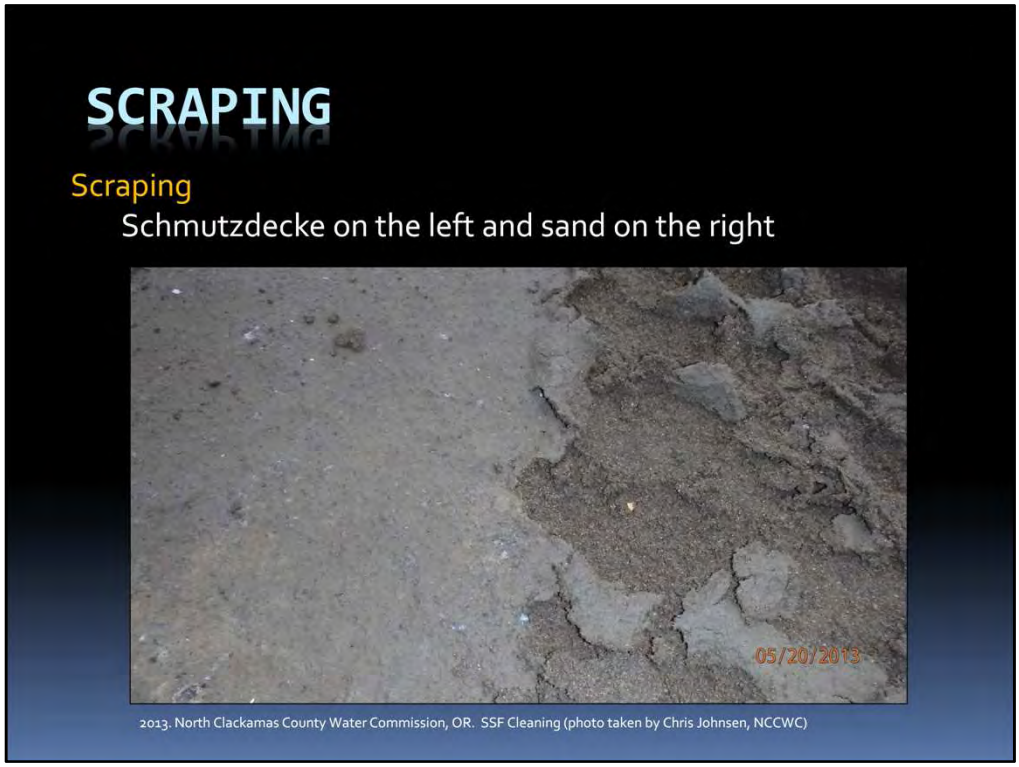

This photo shows the difference when the schmutzdecke has been scraped off of a filter cell at the North Clackamas County Water Commission plant (photo credit Chris Johnsen).

Scraping, can be accomplished either by hand or using machines, depending upon the size of the beds. Either way, cleaning efforts should strive to minimize the time a filter is off-line. Design should account for this and allow for ways to identify when too much sand has been removed through progressive cleanings. Storage should also be provided for equipment and stockpiled sand. Design should consider access to the filter beds, as dictated by the cleaning method of choice. Ideally, the design should include on-line instrumentation to monitor individual and combined filter effluent turbidity as well as providing for sampling of filter-to-waste water for determining when a newly cleaned filter is ready to be put back into service.

Flat, square bladed shovels, snow shovels or asphalt rakes have all been used to scrape filters. This photograph shows a fairly large filter being scraped by hand using a flat bladed shovel. Photo provided by Stephen Tanner, ret. Idaho DEQ.

Hand scraping was performed at the Empire, Colorado filter plant, in which the schmutzdecke and the top 0.5 cm of sand was scraped into windrows using asphalt lutes. The scraped material was then shoveled into 5-gallong buckets for removal. The cleaning rate for this operation was estimated to be 205 ft^2 of filter area per person per hour. Avoid treading directly on the schmutzdecke by using plywood and plants to tread and/or operate wheelbarrows on.

SCRAPING BY HAND

Hand scraping filter:

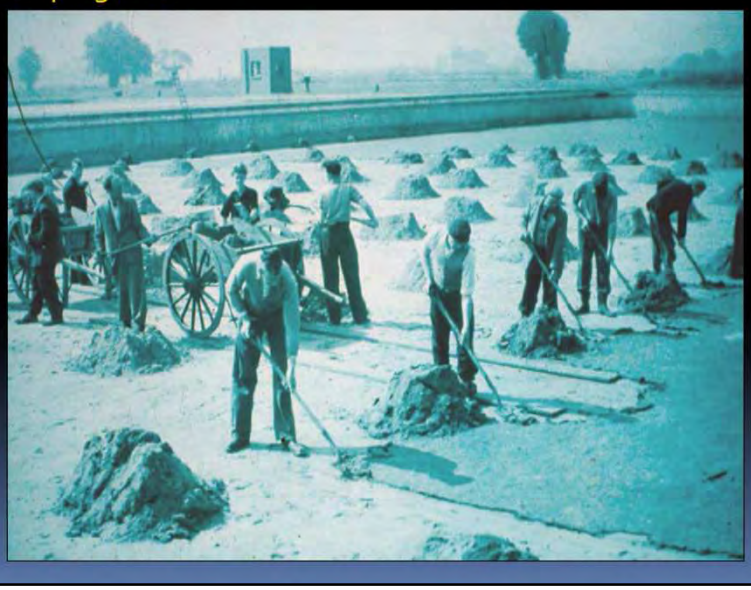

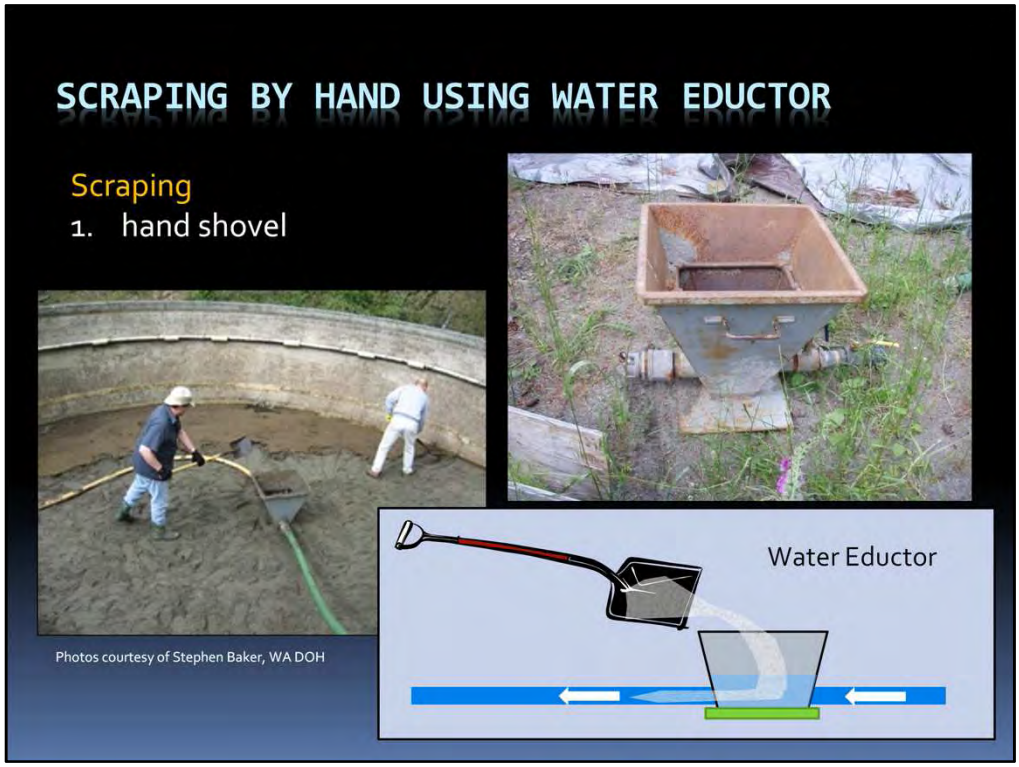

Manual cleaning operations eliminate the risk of spilled oils or hydraulic fluid from tractors or other motorized or hydraulic equipment, not to mention the capital and O&M costs of such equipment. This photo shows sand being scraped off of a slow sand filter using shovels and loaded into a water powered eductor (shown below) where it is then "sucked" into the sand washer (shown at right). These photos were taken by Stephen Baker at the Washington Department of Health.

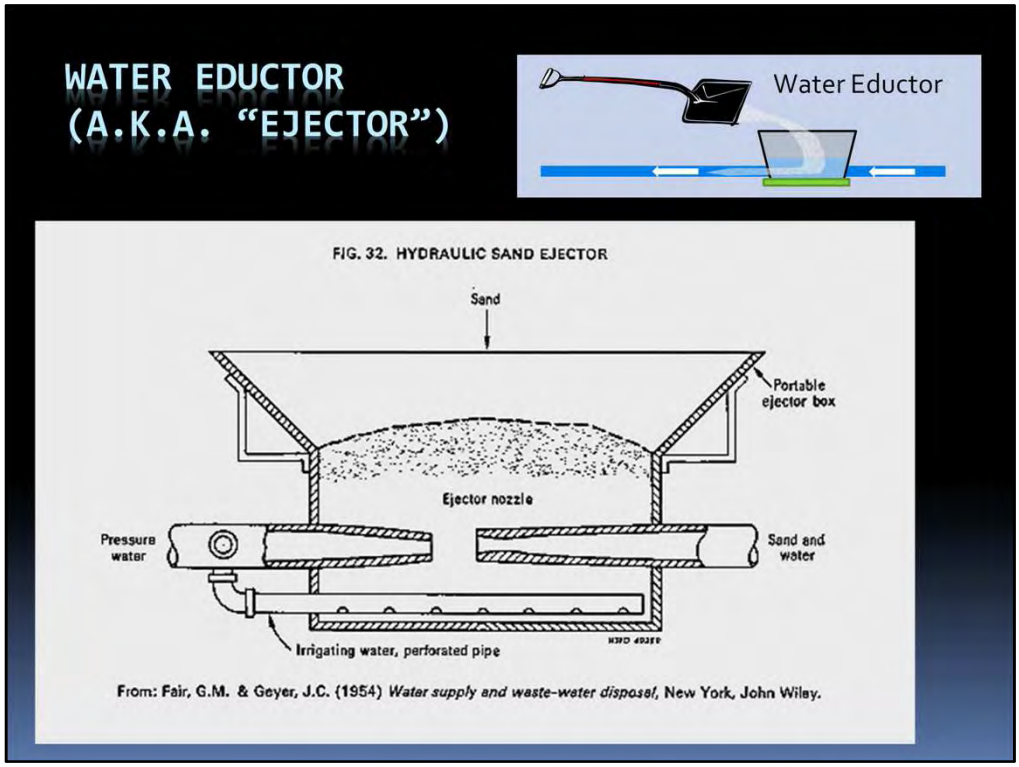

The "eductor" is described as a "hydraulic sand ejector" in the World Health Organization's "Slow Sand Filtration" Manual from 1974.

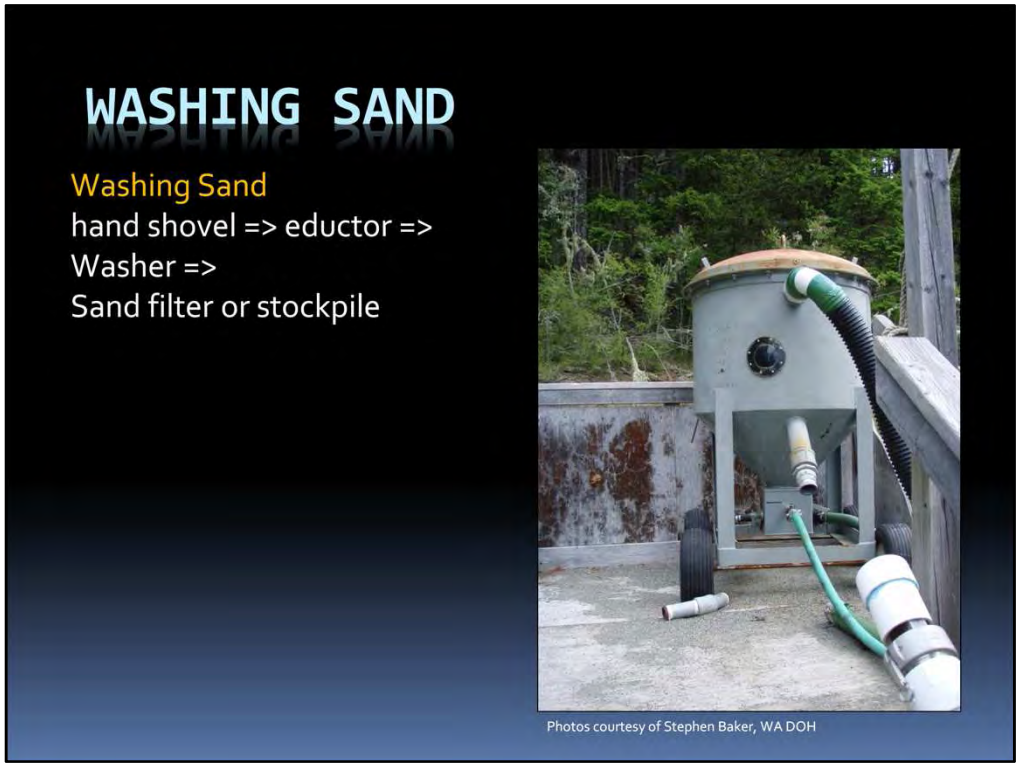

From the eductor, sand and water are transported to the sand media washer. This photo was also taken by Stephen Baker at the Washington Department of Health.

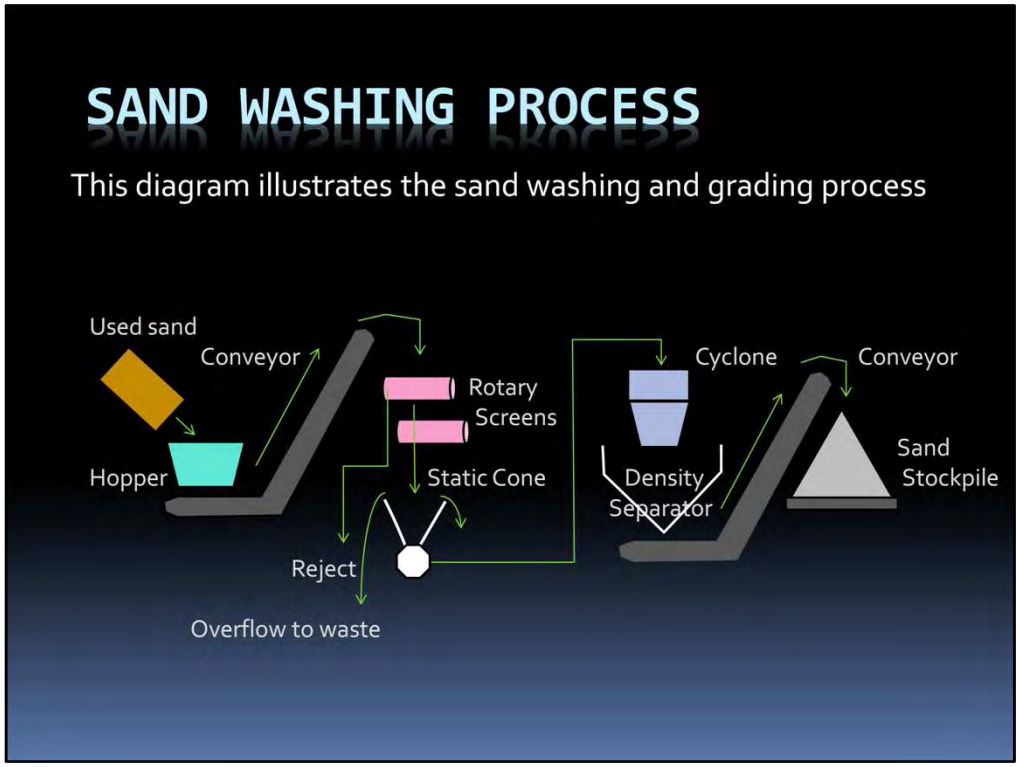

This diagram illustrates the basic sand washing, screening, and stockpiling of used sand.

These photos show the washing of scraped sand for the City of Salem, OR. Photos taken by Evan Hofeld on 10/14/14.

This photo shows cleaning a slow sand filter cell at the North Clackamas County Water Commission using a DeJong Products, Inc. “sand cleaner”, now marketed as a “Filter Bed Refurbisher” (photo credit Chris Johnsen, DeJong Products is located in Sheridan, OR. http://www.dejongproducts.com/).

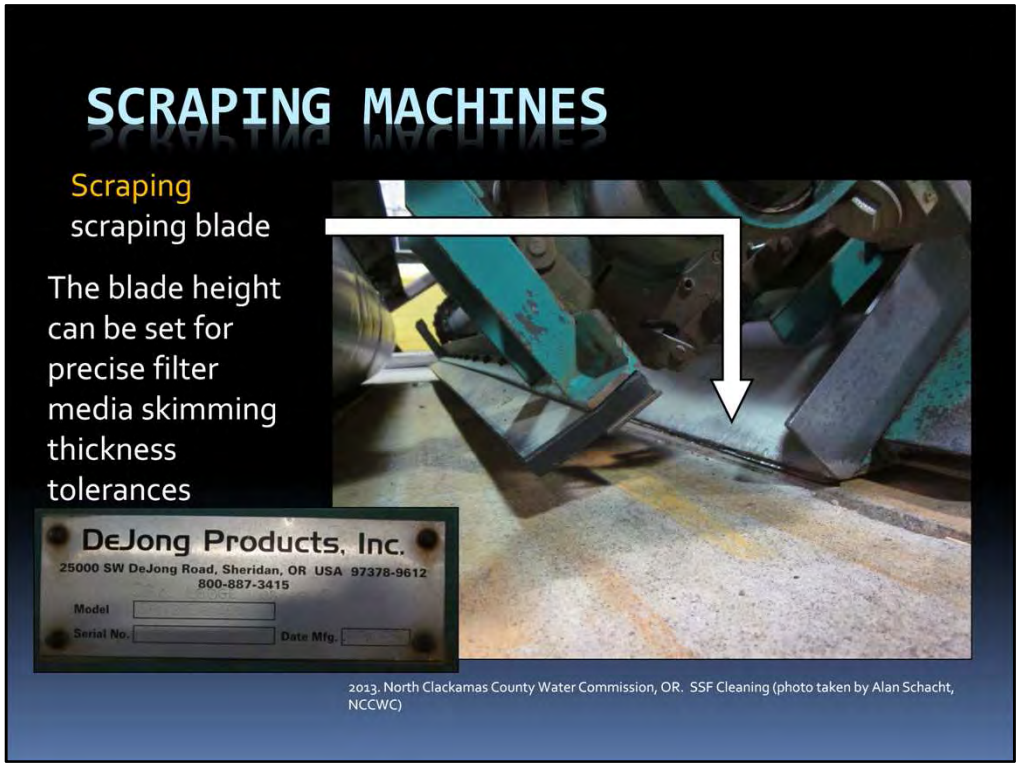

Scraping machines can allow for the blade height to be set for precise filter media skimming thickness tolerances. This photo shows the scraping blade for the DeJong sand cleaner or “filter bed refurbisher” at the North Clackamas County Water Commission (photo credit Alan Schacht, NCCWC).

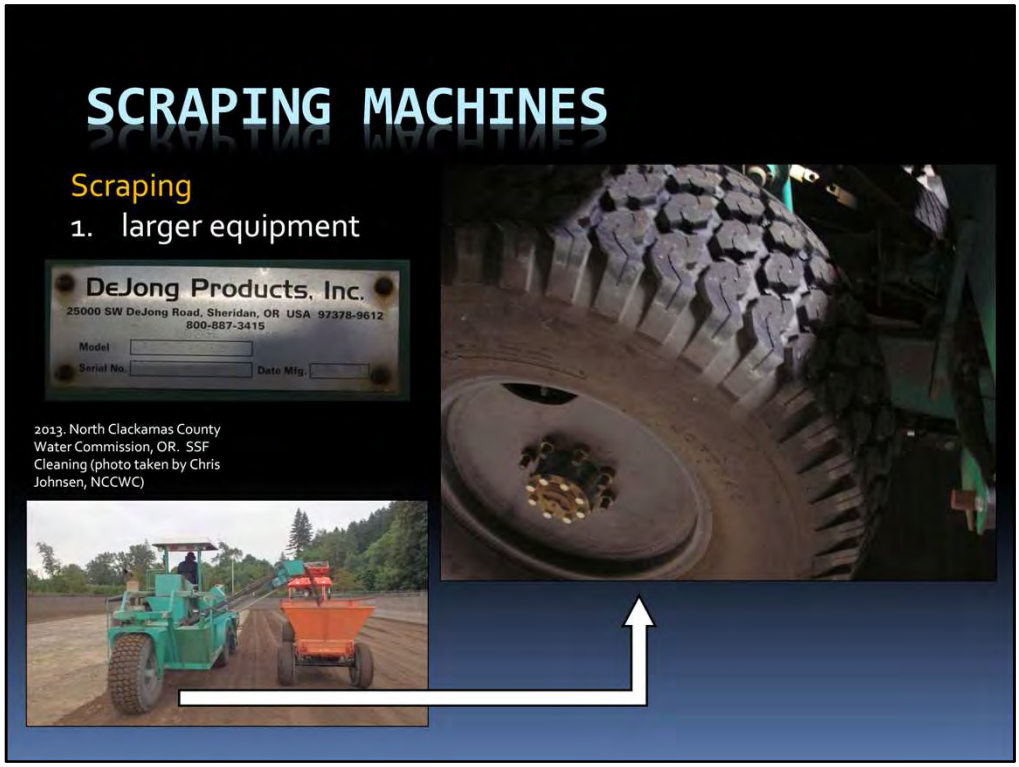

Note the tires used on cleaning machines are designed to distribute the weight minimizing compaction and ruts.

Larger equipment may be used to clean filter beds, like this USG Puma 2400 "Sand Skimmer" designed in the United Kingdom and used by the City of Salem (USG Umwelservice GmbH & Co KG, http://www.puma2400.de/en/component/content/frontpage). An adjustable blade allows for precise skimming at a fairly fast rate (16,000 ft^2/hr to remove 4" sand depth. Typically only ~1/4 – ½ an inch of sand is removed at any one cleaning)

This is a scraping in process.

Scraping
USG Puma 2400

Video of backing up to start a new row

www.youtube.com/embed/g259QNQRbDY

USG Puma 3000

www.youtube.com/embed/AtX65tbf1q8

Scraping
USG Puma 2400

Video of starting a new row
(note the flat tread)

www.youtube.com/embed/g259QNQRbDY

USG Puma 3000

www.youtube.com/embed/AtX65tbf1q8

Scraping
USG Puma 2400

Video of cutting wheel in use

www.youtube.com/embed/g259QNQRbDY

USG Puma 3000

www.youtube.com/embed/AtX65tbf1q8

Scraping
USG Puma 2400

Close up video of cutting wheel

www.youtube.com/embed/g259QNQRbDY

USG Puma 3000

www.youtube.com/embed/AtX65tbf1q8

Scraping
USG Puma 2400

Video showing how end row is removed

www.youtube.com/embed/g259QNQRbDY

USG Puma 3000

www.youtube.com/embed/AtX65tbf1q8

HARROWING PROCESS

Harrowing Process (also called wet harrowing)

1. Water is lowered to approximately 6" above the sand level;
2. Water is introduced to provide a cross flow at a rate of about 20 gpm/ft^2 of cross-sectional area (e.g., 1,000 gpm for 6" water depth in a 100-ft long filter);
3. Filtered, unchlorinated water is introduced from the bottom to provide a "backflow", which keeps debris from sinking into the filter bed;
4. Stiff tined rake or harrow equipment is run over the top of the sand;
5. The debris (not sand) is then conveyed out of the filter bed from a harrow drain located just above the sand bed;
6. The beds are leveled;
7. Slowly re-filled from the bottom to about 12" above the sand (this prevents sand scour that may occur from top filling)
8. Slowly filled from the top the remaining amount; and
9. Filtered to waste until fully ripened, which is typically shorter than scraping.

Wet harrowing is a common method of cleaning small filters. This is often accomplished with just a stiff-tined garden rake. With the water level lowered to about 6" above the sand, the top 2-3 inches of sand is agitated. The material suspended by the raking action is then decanted from the top of the filter through a harrowing valve and waste piping. A slow backflush using filtered (but unchlorinated water) helps keep the suspended material from being driven down into the filter.

Wet harrowing can be done with a chain harrow or a comb-toothed harrow.

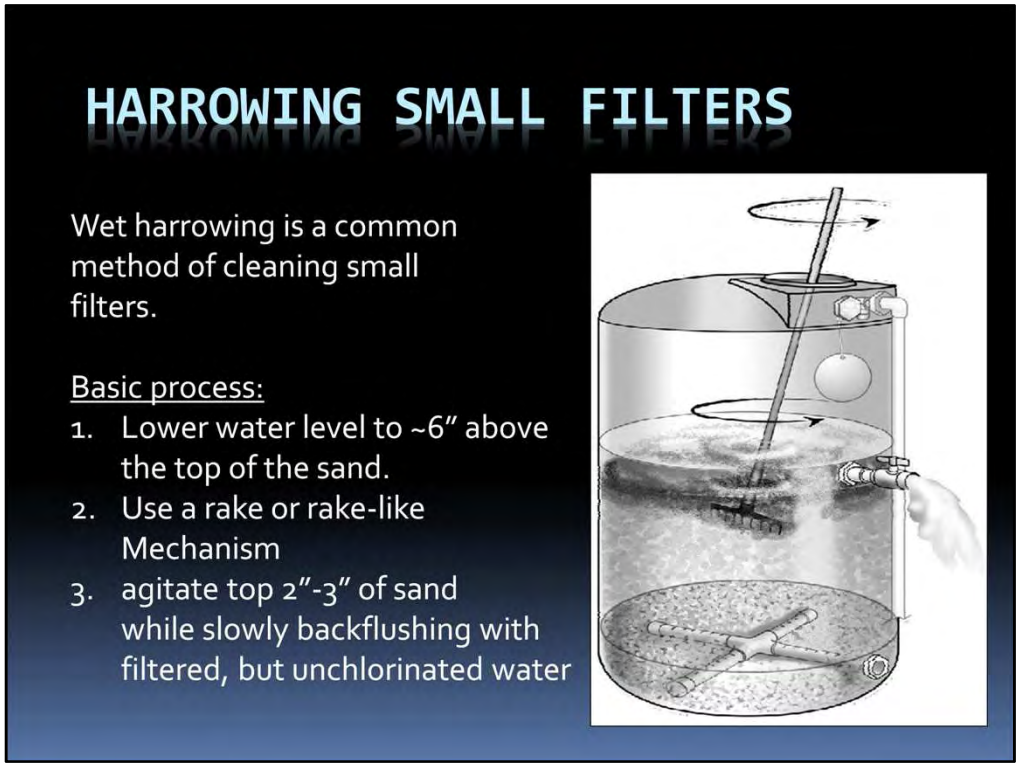

Wet harrowing is a common method of cleaning small filters.

This shows harrowing in process of a small, 3-gpm filter. [This photo is Jewell School District #8 in Clatsop, Oregon.]

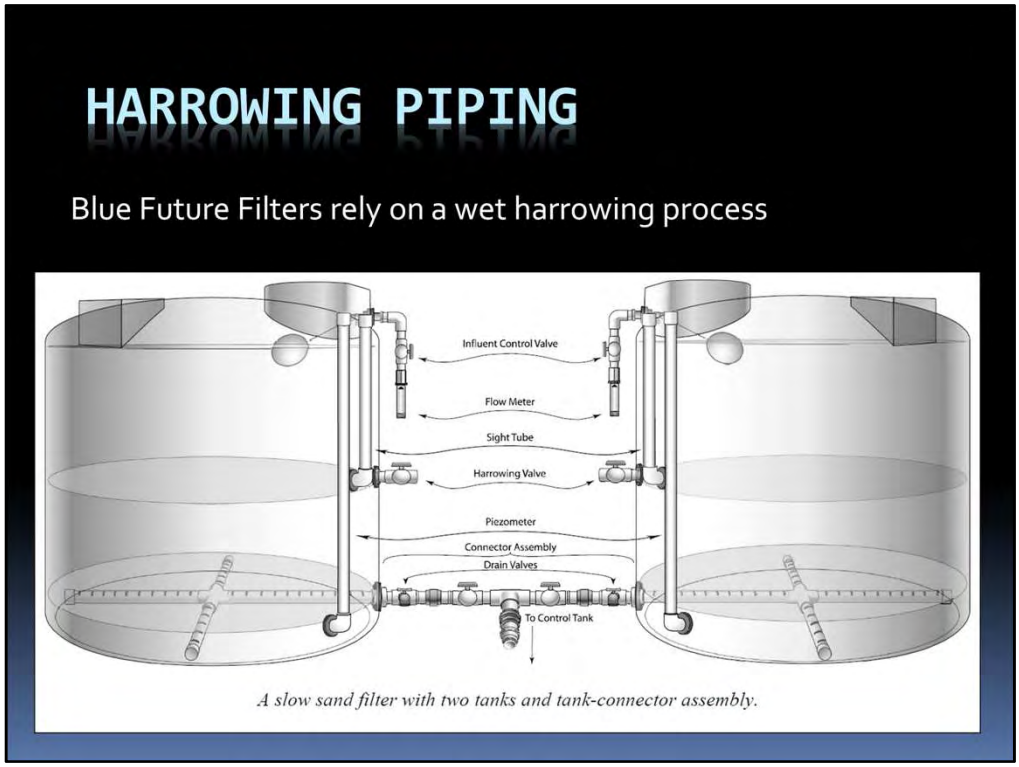

This diagram shows the harrowing valve and underdrain piping in a modular filter design marketed as Blue Future filters.

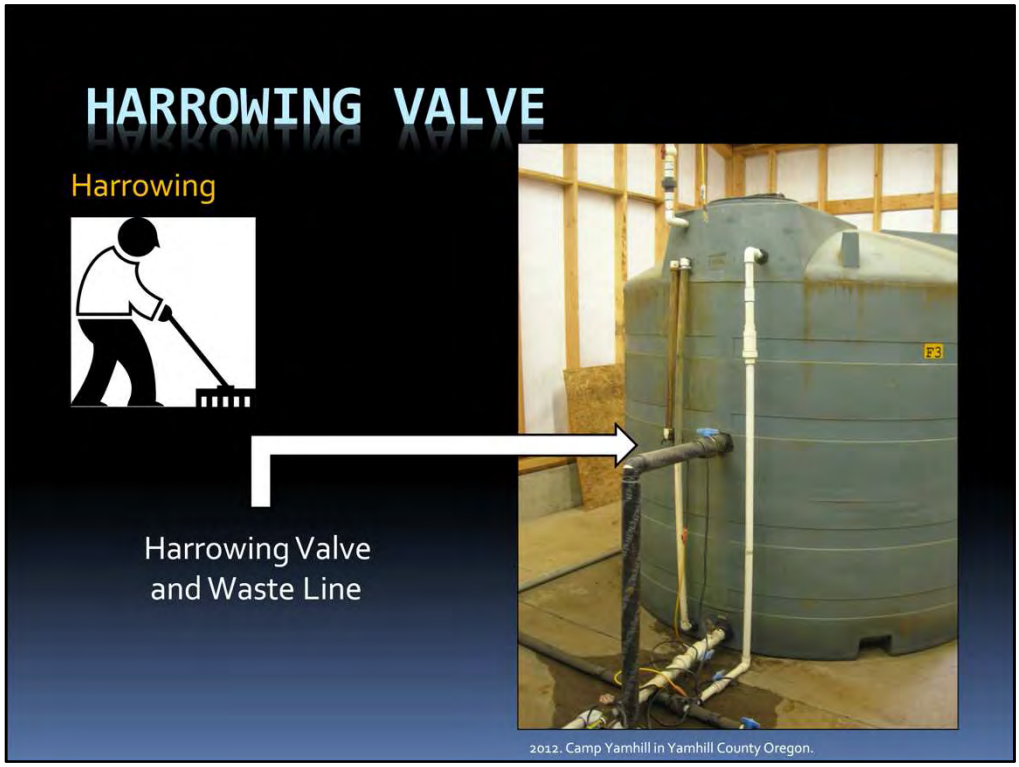

This shows the location of a harrowing valve and waste line, situated just above the sand bed, which allows the backflushed debris to be wasted. This photo is from Camp Yamhill in Yamhill County, Oregon.

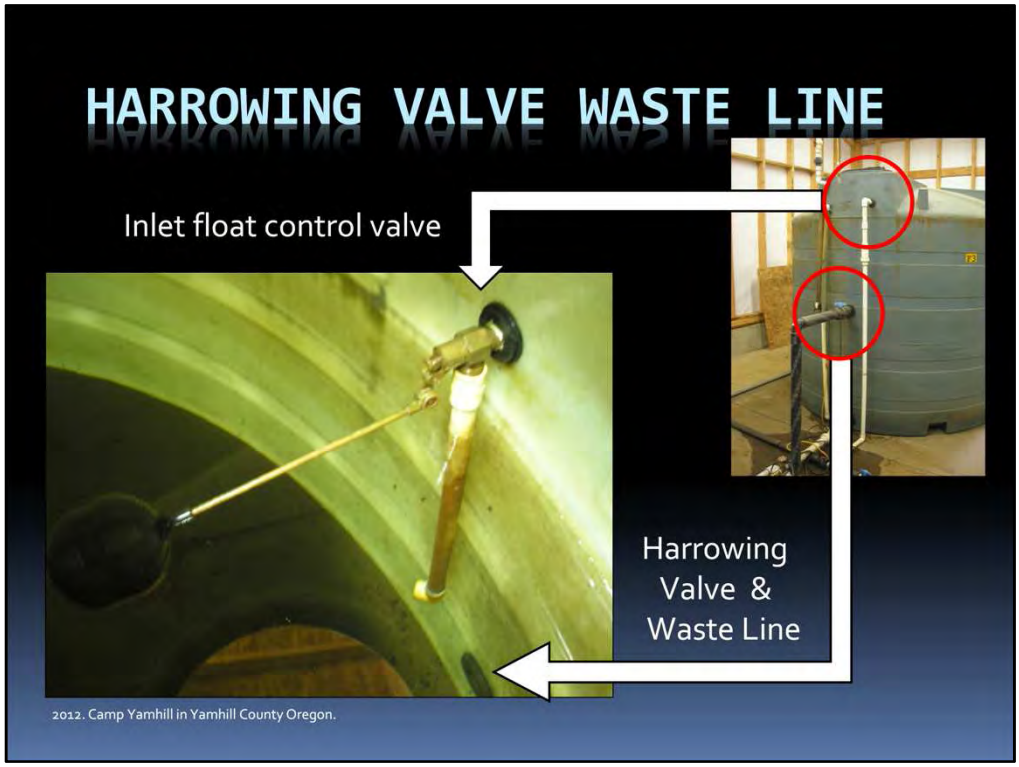

This shows the location of the inlet float control valve as well as the harrowing waste line on the inside of the filter. [This photo is also from Camp Yamhill in Yamhill County, Oregon.]

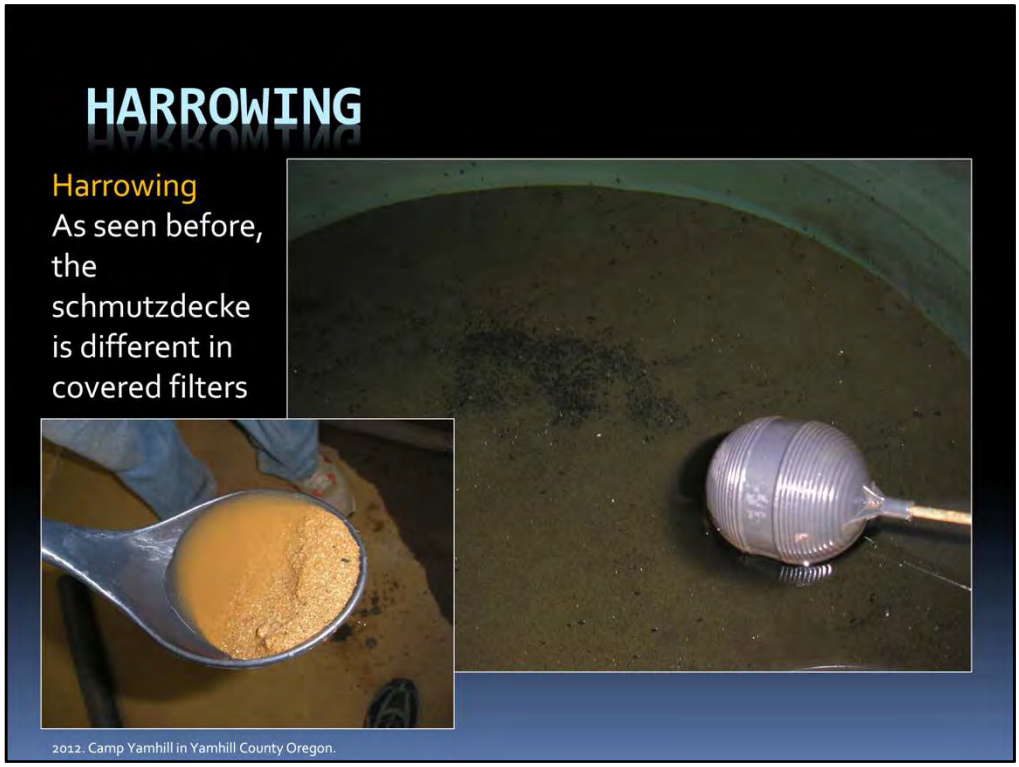

As seen before, the schmutzdecke is more of a brownish layer in a covered filter rather than a filamentous mat as oftentimes observed in uncovered filters exposed to sunlight. [This photo is also from Camp Yamhill in Yamhill County, Oregon.]

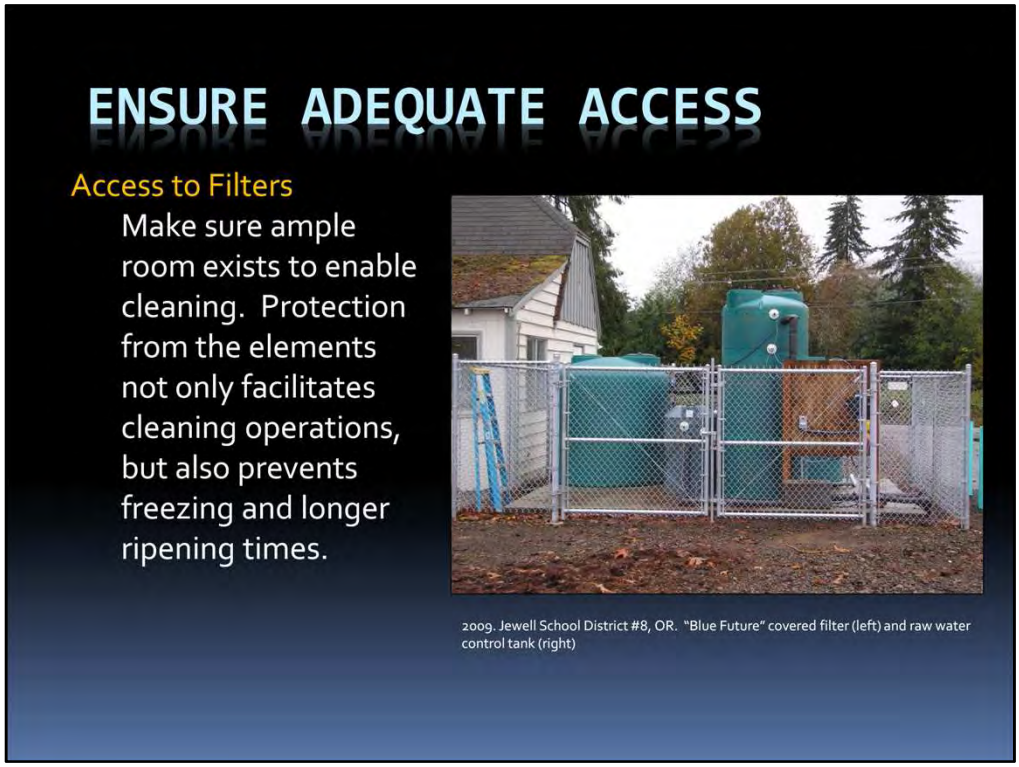

This photo shows a covered "Blue Future" filter installed at the Jewell School District #8 in 2009. The green tank on the left is the filter, the taller green tank on the right is the raw water control tank, and the small grey tank in the middle is the effluent control tank. These filters are also designed to be harrowed rather than scraped and were later fully enclosed inside a building.

SCRAPED VS HARROWING

Parameter	Scraped	Harrowed (wet harrowed)
Biomass Development	Biomass and schmutzdecke take longer to develop due to the removal of biomass	Biomass and schmutzdecke restore at a faster rate, however, the sudden release of nutrients can cause dissolved oxygen to dip as microbial grazing intensifies. Keeping influent water flowing and filtering to waste at a higher initial rate can help to replenish depleted oxygen levels.
Removal Efficiency	Equivalent once filter is properly ripened	Equivalent once a filter is properly ripened – usually takes less time to accomplish this.
Filter life	Impacted by removal of top ~2 cm of plugged sand layer	Little media loss leads to longer filter life. Media is more susceptible to deep bed clogging if not done properly.

There are pros and cons to the use of either scraping or harrowing methods and although harrowing seems to have many benefits such as faster ripening times and less depletion of sand, if not done properly, harrowing can lead to deep bed clogging and depleted oxygen levels. Harrowing also requires a lot more water for flushing, which may make it unfeasible for some larger applications where availability of filtered water and storage of wastewater are limited.

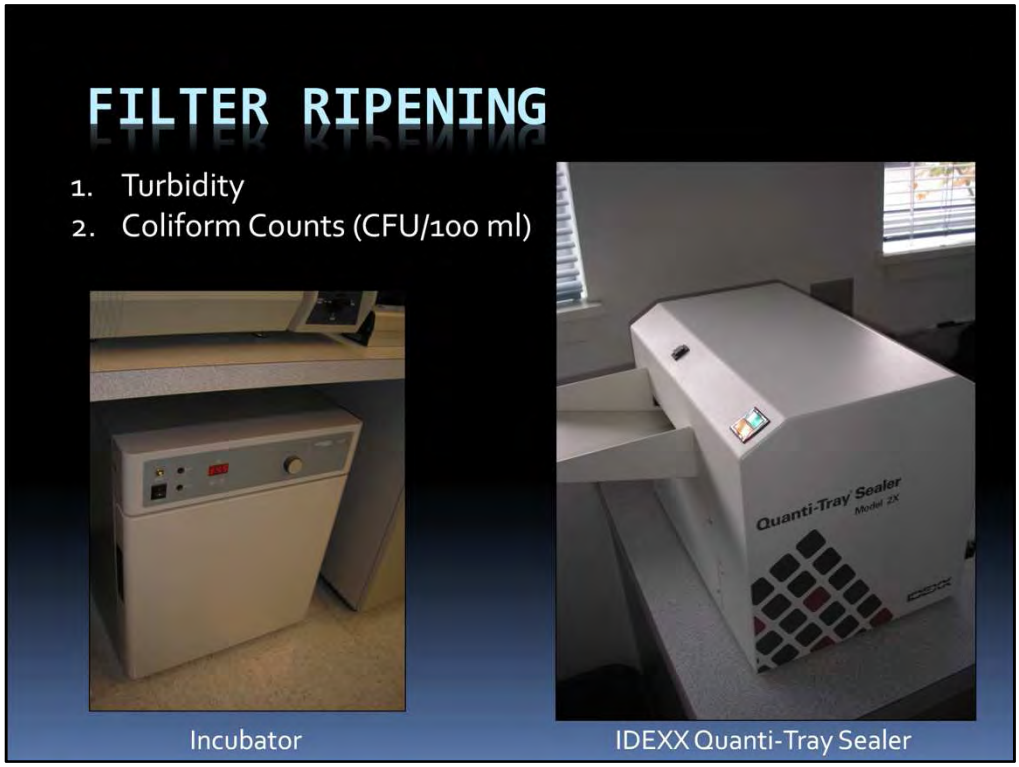

Turbidity and coliform counts in terms of colony forming units per 100/ml are used to determine when the filter has sufficiently ripened (or recovered) from a cleaning. This can all be done in-house. This example shows an IDEXX Quanti-Tray sealer (right) and incubator (left).

There are two methods commonly used to re-sand filters. One method is called the trenching or "throw-over" method, where some of the old sand is re-used and the other is just a full replacement of the sand, where all the sand is excavated and replaced.

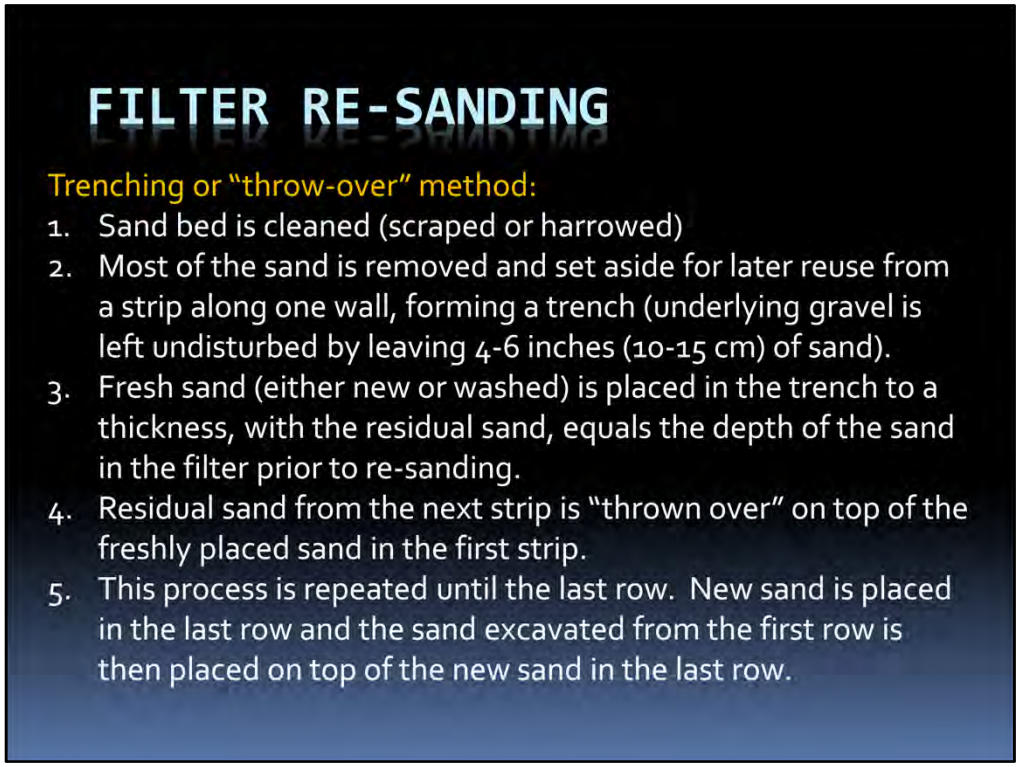

The trenching method or "throw-over" method is described here.

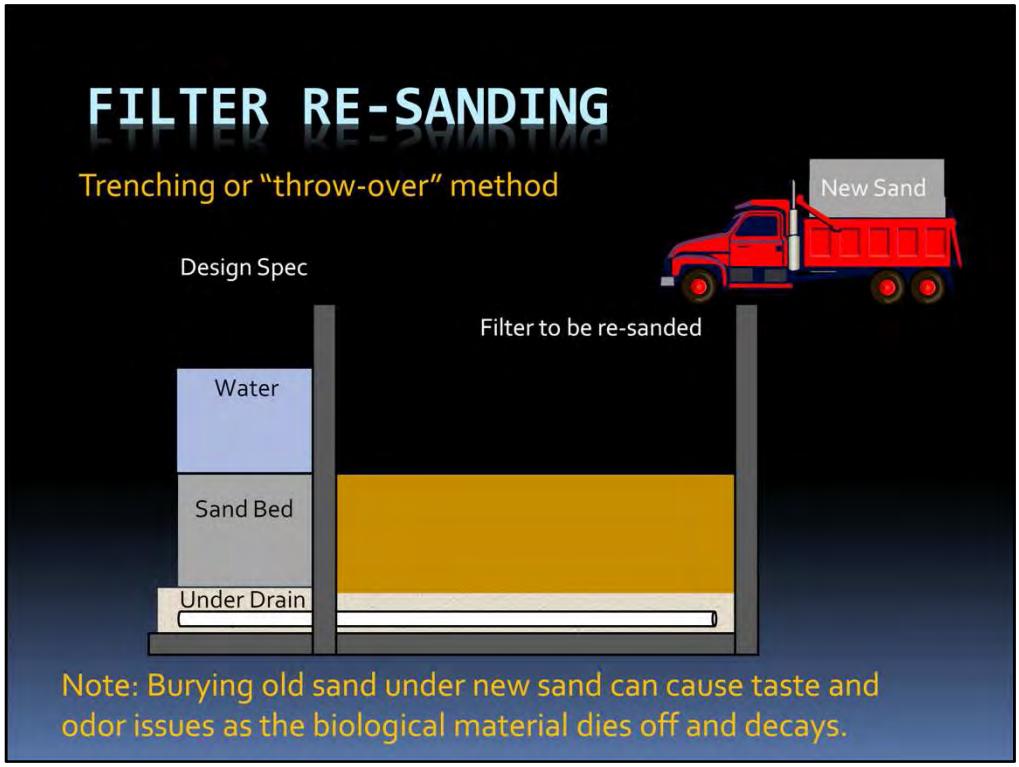

This is an illustration of how the trenching method is carried out.

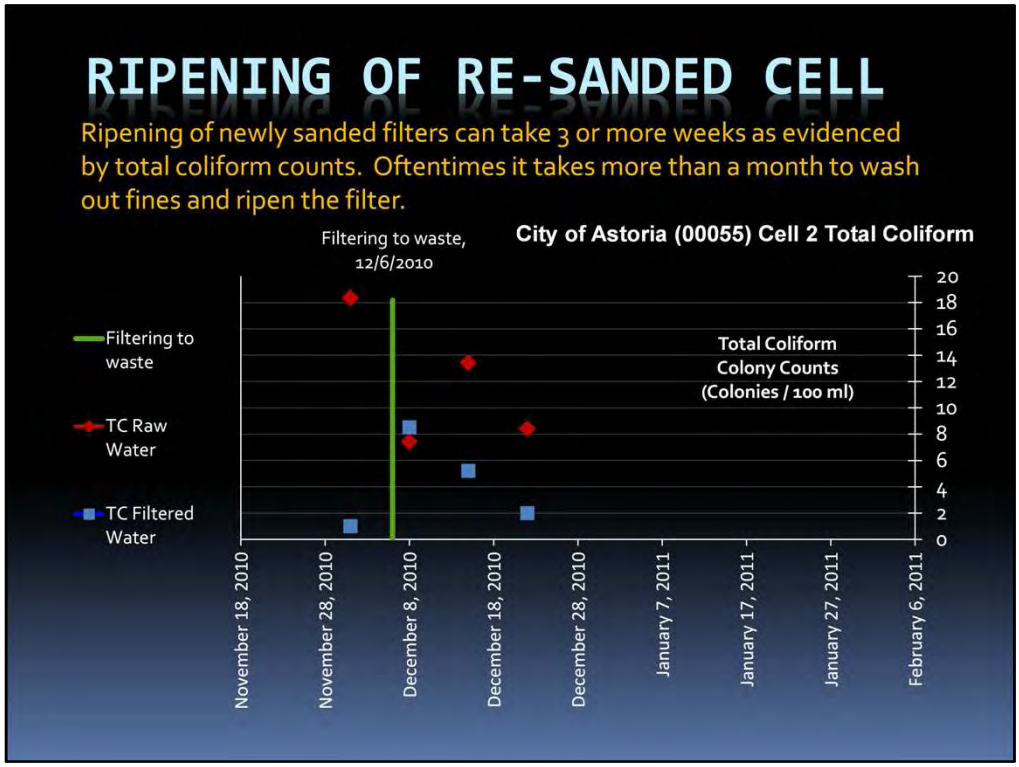

Once re-sanded, the filter should be filtered-to-waste until it is fully ripened. This can take several weeks to months to accomplish. This graph show a newly sanded filter cell #2 for the City of Astoria, OR. Data to the left of the vertical green line shows filter performance before the filter was taken off-line for re-sanding. Data to the right of the green line shows coliform removal and sand bed ripening during filter-to-waste after re-sanding.

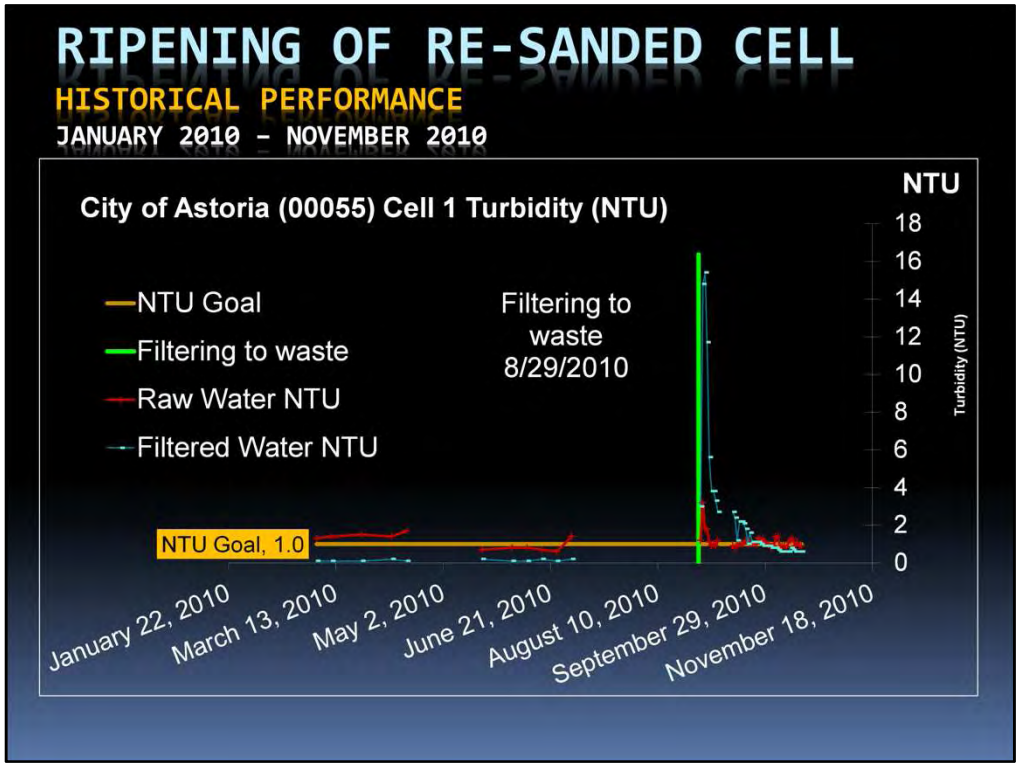

This graph shows historical turbidity performance data for Astoria's re-sanded Cell #1. 1 NTU is shown as the regulatory "goal" or limit. Data to the left of the vertical green line shows filter performance before the filter was taken off-line for re-sanding. Data to the right of the green line shows turbidity removal and sand bed ripening during filter-to-waste after re-sanding.

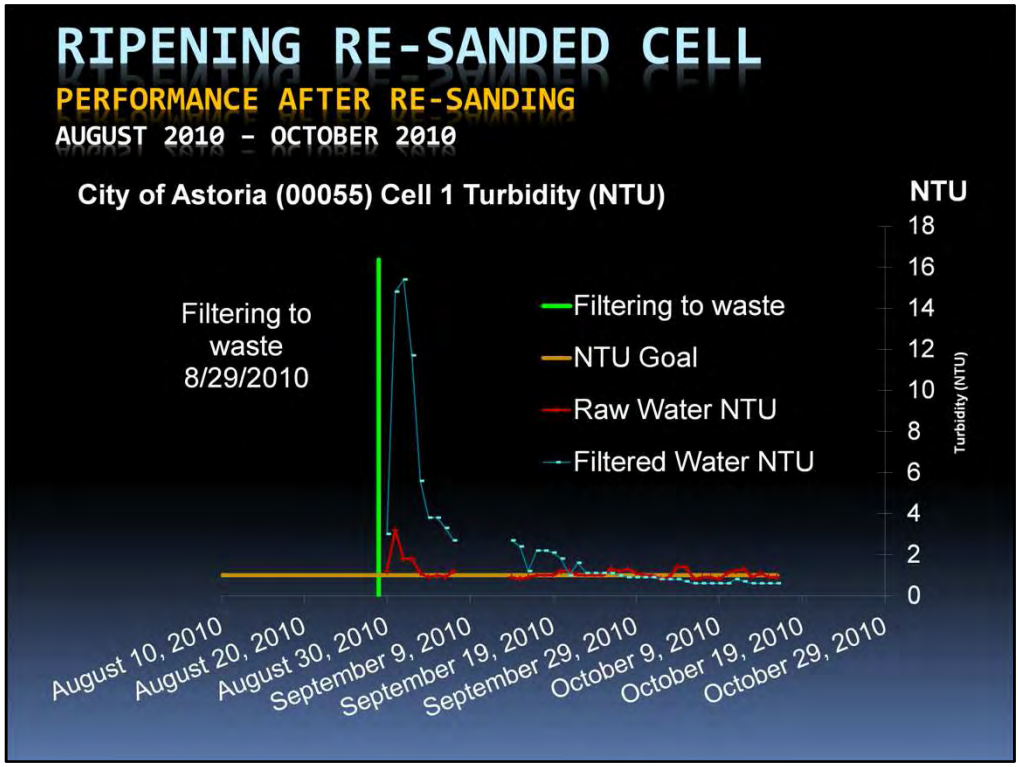

This graph shows turbidity performance data during the fiter-to-waste and ripening for Astoria's re-sanded cell #1. This is just a close-up view of the data shown on the previous slide to better see the performance improvement during ripening. Again, data to the right of the green line shows turbidity removal and sand bed ripening during filter-to-waste after re-sanding.

MONITORING

The recommended minimum location points for recording and monitoring include:

Source water for:

- Turbidity
- Flow
- Temperature
- pH
- Grab sampling of coliform, TOC, or other water quality parameters

Supernatant for:

- Level
- Headloss
- Grab sampling of coliform, TOC, or other water quality parameters

MONITORING

Individual filter effluent for:

- Flow rate and quantity
- Turbidity
- Grab sampling of coliform, TOC, or other water quality parameters

Combined filter effluent for:

- Flow rate and quantity
- Turbidity
- Grab sampling of coliform, TOC, or other water quality parameters

Finished water (post disinfection and storage used for disinfection contact time) for:

- Flow rate and quantity
- pH
- Temperature
- Chlorine residual
- Grab sampling of coliform, TOC, or other water quality parameters

Finished water storage for:

- Effluent flows
- Level

COLIFORM COUNTS

1. Membrane Filtration (CFU/100 ml) – SM 9221A,B – exact count
2. Multiple-Tube Fermentation (MPN/100 ml) – SM 9222A,B,C – statistical estimate
3. ONPG-MUG Test or "Autoanalysis Colilert" (MPN/100 ml) – SM 9223 – estimate

Most Probable Number (MPN/100 ml)

(both examples below use statistical MPN t

Multiple-tube fermentation (MTF)

(e.g., 10-tube Standard Methods MTF)

- Test tubes (20 x 150 mm)
- Culture media (e.g., R2A agar)
- Scale to measure media
- Autoclave to sterilize media
- Incubator
- Formation of gas first indicates presumptive positive results, which are then confirmed

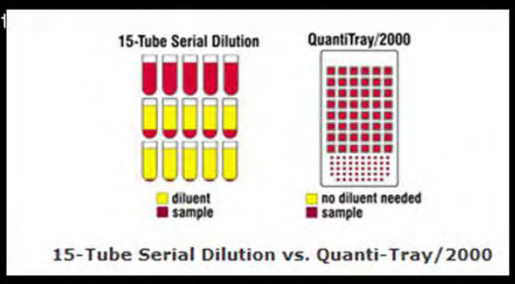

IDEXX Quanti-Tray and Quanti-Tray/2000

- Quanti-Tray Sealer & Incubator (35°C)
- IDEXX Quanti-Tray Range: 1-200 CFU/100 ml (95% confidence)
- IDEXX Quanti-Tray/2000 Range: 1 – 2,419 CFU/100 ml (95% confidence)
- Ortho-nitrophenyl-β-galactopyranoside (ONPG) reagent
- 4-methylumbelliferyl-β-D-glucuronide (MUG) - only *E.coli* produce an enzyme that reacts with MUG

COLIFORM COUNTS

1. Membrane Filtration (CFU/100 ml) – SM 9221A,B – exact count
2. Multiple-Tube Fermentation (MPN/100 ml) – SM 9222A,B,C – statistical estimate
3. ONPG-MUG Test or "Autoanalysis Colilert" (MPN/100 ml) – SM 9223 - estimate

Membrane Filtration (Colony Forming Units/100 ml)

- A sample of water is filtered through a membrane (0.22-0.45 µm pore size)
- Filter is removed and placed on growth medium (nutrients feed colony growth)
- Number of colonies are counted (each colony arises out of 1 coliform)

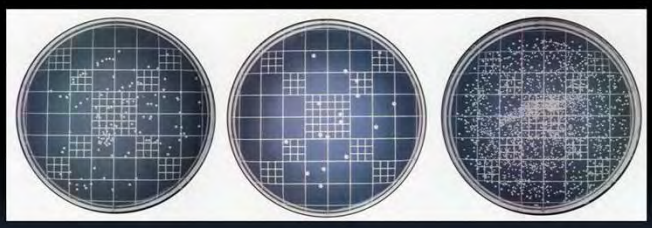

Photographs of plates with countable colonies (left), too few colonies to count (middle) and too numerous colonies to count (right). Colonies are the white circular forms and theoretically arise from a single cell called a colony forming unit.

(A Photographic Atlas for the Microbiology Laboratory. Michael J. Leboffe and Burton E. Pierce. 2nd Edition. Pp 83-85, Morton Publishing Co, Englewood, CO).

In the membrane filtration technique, water samples are drawn through a membrane filter with a particular pore size. Most filters used in this process have pore sizes of 0.22 or 0.45 microns (µm). The pores allow matter smaller than 0.22 or 0.45 um to pass through the filter, whereas matter/cells that is larger gets caught on top of the filter. Therefore, microorganisms that are usually 1.0 um and larger are caught on top of the filter. The filter is then removed and placed on top of a growth medium. The nutrients freely diffuse through the membrane and the microbial cells are able to grow on top of the membrane. The photographs show plates with countable colonies (left), too few colonies to count (middle) and too numerous colonies to count (right). Colonies are the white circular forms and theoretically arise from a single cell called a colony forming unit.

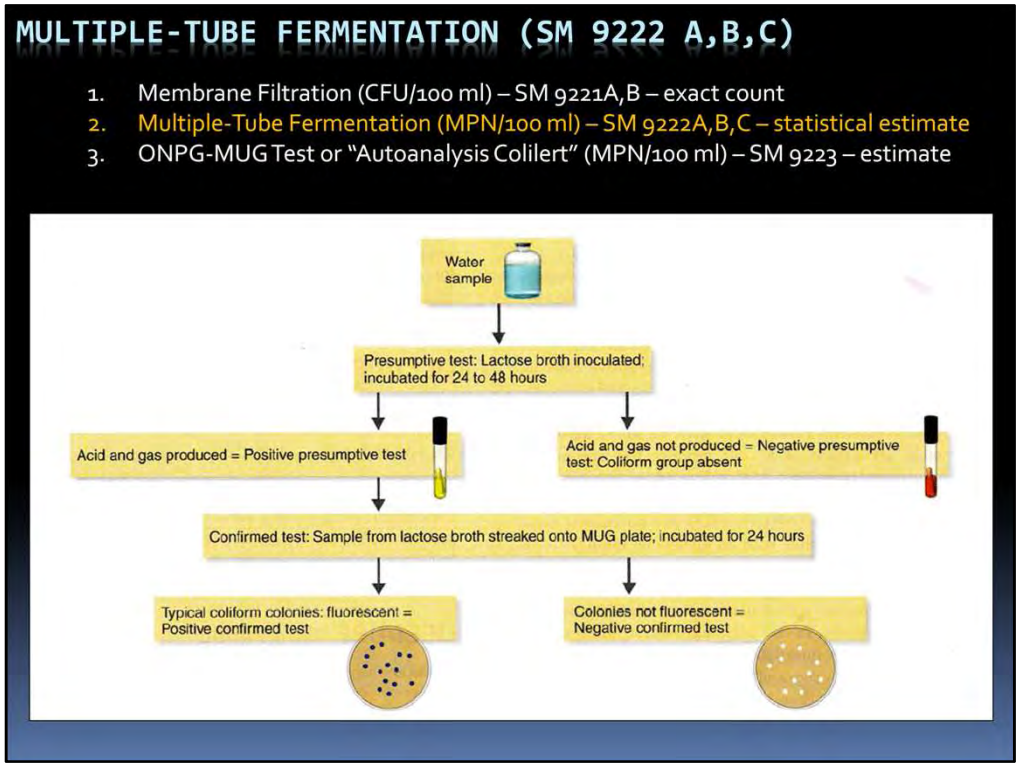

The **most probable number test**, also called the multiple tube fermentation assay, is an alternative to plate counts or membrane techniques, especially for samples with higher turbidity. The MPN procedure is a tube-dilution method using a nutrient-rich medium, which is less sensitive to toxicity and supports the growth of environmental-stressed organisms. The MPN method detects and estimates the bacteria in water samples (and can be applied to foods and soils) by the multiple fermentation tube technique. The number of bacteria per 100 ml of sample is estimated by the use of probability tables. The method has two test stages: The Presumptive Test, and the Confirmed Test. The presumptive tests are designed to grow the target bacteria. The media used in the confirmed tests are designed to validate the growth of target bacteria in the presumptive test. Confirmed test conditions are usually more stringent than presumptive conditions. Thus, the presumptive test provides a preliminary estimate of bacterial density based on enrichment in minimally restrictive tube media. The results of this test are never used without further analysis; the MPN must be carried through the Confirmed Test for valid results. The MPN per 100 ml is calculated from the MPN table based upon the Confirmed Test results.

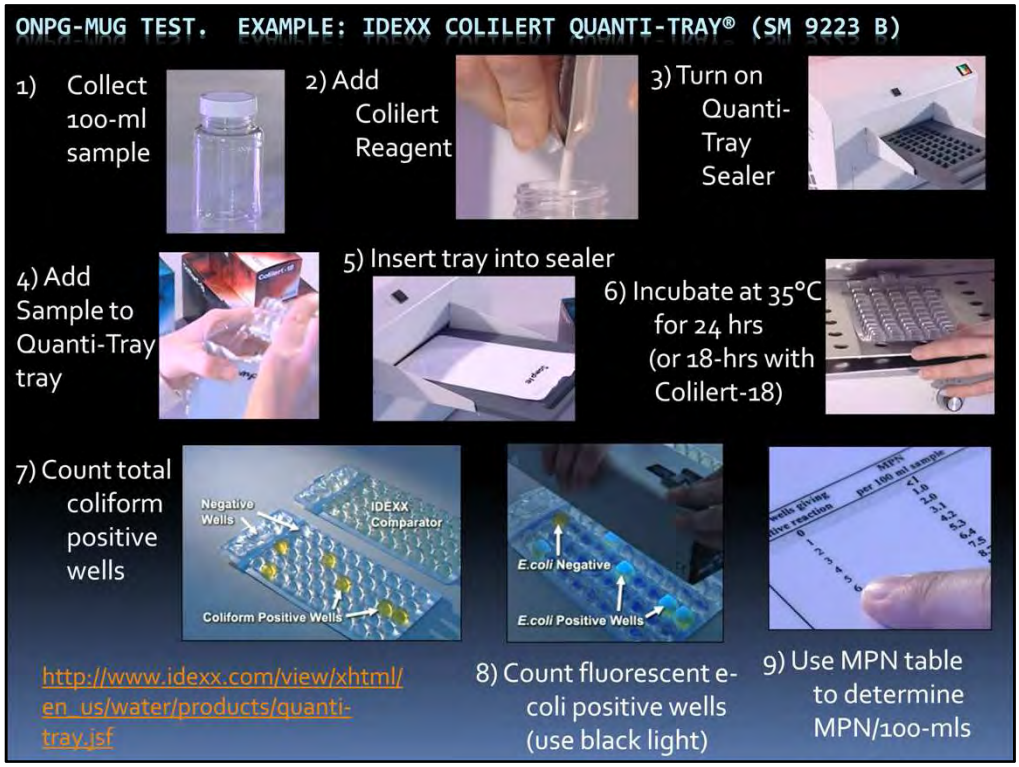

In the ONPG-MUG test, a 100 mL water sample is added to a flask containing the MMO-MUG powder, mixed, and incubated at 35 ± 0.5º C for 24 hours (or 18-hrs using Colilert-18). The formation of a yellow color denotes the presence of total coliforms. E-coli is indicated by those yellow cells in the Quanti-tray that fluoresce in the presence of a black light. Coliform react with Ortho-nitrophenyl-β-galactopyranoside (ONPG) resulting in the yellow color and and only E.coli produce an enzyme that reacts with 4-methylumbelliferyl-β-D-glucuronide (MUG) causing the flourescence under a black light (long-wave UV light), therefore the ONPG-MUG test can be used to detect both total coliform and E. coli.

MONITORING HEAD LOSS

Head loss Measurement

On smaller facilities, routine visual observation of the supernatant depth and recording of the flow rate may be sufficient to monitor filter head loss development.

On larger facilities, screened probes at the top and bottom of the filter sand can allow easy measurement of head loss with simple piezometers mounted outside the filter, or through the use of a differential pressure transducer connected to the facility's SCADA system.

Tracking this data will allow the operator to predict and plan filter cleanings.

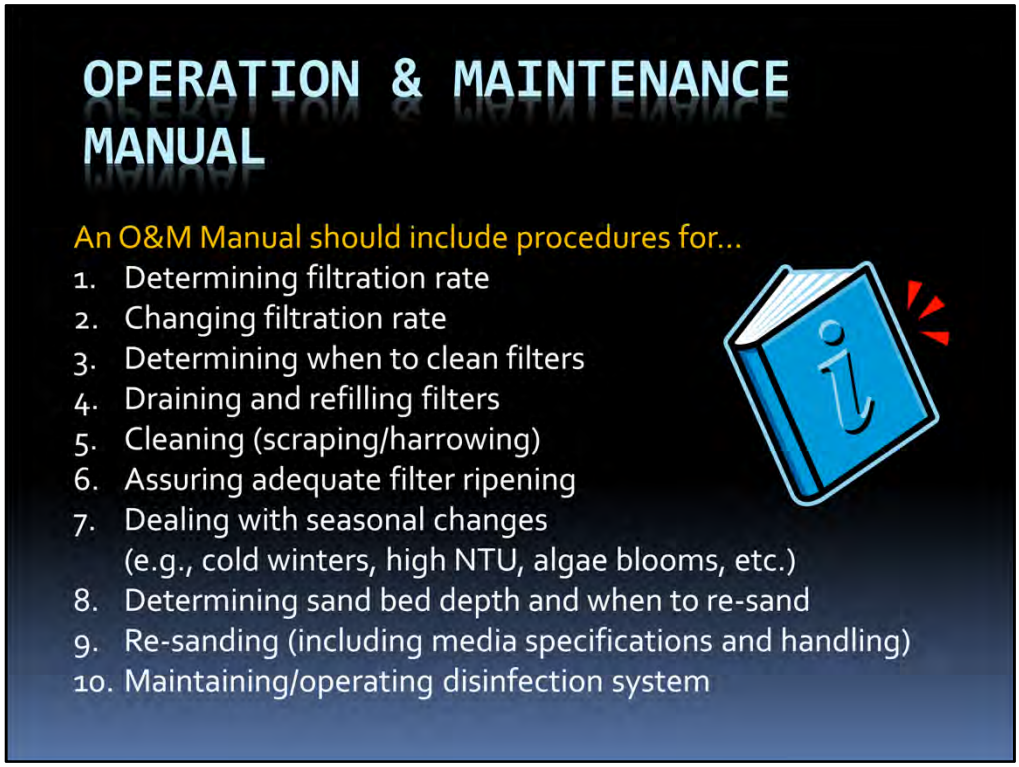

An operation and maintenance manual is critical to producing consistent water quality and maintaining facilities year after year. This documentation becomes especially important during changes of operational staff or staff functions. At a minimum, the manual should include procedures listed here.

O&M MANUALS

Other procedures include:

- Instrument calibration methods and frequency
- Data handling/reporting

  (Monitoring for regulatory requirements and process control)
- Chemical dosage determinations
- CT determinations
- Responding to abnormal conditions (emergency response plan)

MAINTENANCE TASKS

Frequency	Labor (person hours)	Slow Sand Filter Maintenance Task
Daily	1 - 3	Check raw water intake Check/adjust filtration rate Check water level in filter Check water level in clear well Sample & check water quality (raw/finished NTU, raw temp) Check pumps Enter observations in logbook
Weekly	1 - 3	Check & grease any pumps & moving parts Check/re-stock fuel Sample & check water quality (coliform) Enter observations in logbook
1 – 2 months	5 / 1,000 ft2 50 / 1,000 ft2 /12 inches of sand for re-sanding (Letterman & Cullen, 1985)	Scrape filter beds Wash scrapings & store retained sand Check & record sand bed depth Enter observations in logbook

The O&M manual should also include a table of maintenance tasks including daily & weekly activities, as well as general cleaning frequency, which take place about every 1-2 months. This table shows the amount of labor that can be expected to be spent on these various tasks.

Based on the reasons cited here, staff from several states in the northwest (ID, OR, AK, WA, and UT) recognized a need to have clear water quality goals and operational guidelines if slow sand filters were to be maintained in operated in an optimal manner. Working with EPA and Process Applications, Inc., a literature review was undertaken to acquire available information. Goals were then developed and provided to experts in the field of slow sand filtration to get input. The goals provided in this training are intended as guidelines as site-specific situations may dictate otherwise.

KEY PUBLICATIONS - 1974

"Slow Sand Filtration", World Health Organization, 1974 ISBN 92-4-154037-0 http://www.who.int/water_sanitation_health/publications/ssf9241540370.pdf

SLOW SAND FILTRATION

L. HUISMAN

Professor of Sanitary Engineering, Department of Civil Engineering, Technological University, Delft, Netherlands

W.E. WOOD, F.I.C.E.

formerly Chief, Community Water Supply, World Health Organization, Geneva

WORLD HEALTH ORGANIZATION

GENEVA

1974

KEY PUBLICATIONS - 1987

Raman, A., Paramasivam, R., Heijnen, H.A. and Visscher, J.T., 1987. *Slow sand filtration for community water supply : planning, design, construction, operation and maintenance*. (Technical paper series / IRC; no. 24). The Hague, The Netherlands: IRC International Water and Sanitation Centre.

http://www.irc.nl/docsearch/title/108720

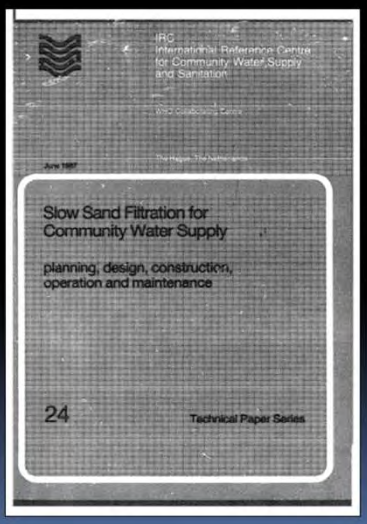

KEY PUBLICATIONS - 1991

"Manual of Design for Slow Sand Filtration" . David Hendricks. American Water Works Association, 1991. ISBN 978-0898675511

KEY PUBLICATIONS - 2009

"Technical Guidelines for the Construction and Management of Slow Sand Filters". UNICEF, 2009.

http://www.bsf-south-sudan.org/sites/default/files/SS+Tech+Guide--Slow+Sand+Filters.pdf

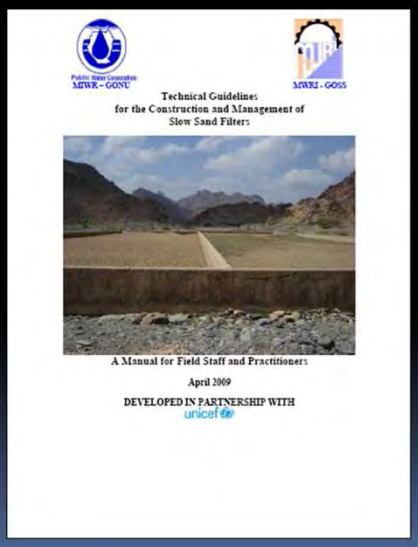
Technical Guidelines
for the Construction and Management of
Slow Sand Filters

A Manual for Field Staff and Practitioners

April 2009

DEVELOPED IN PARTNERSHIP WITH
unicef

KEY PUBLICATIONS - 2012

"Water Treatment Plant Design, 5th Edition". Stephen J. Randtke, Ph.D., P.E.; Michael B. Horsley, P.E. Co-published by the American Water Works Association; Environmental and Water Resources Institute of American Society of Civil Engineers; McGraw-Hill Professional. 2012. ISBN: 9780071745727

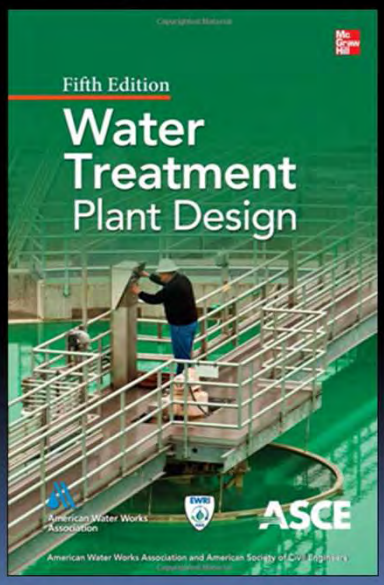

INPUT FROM EXPERTS

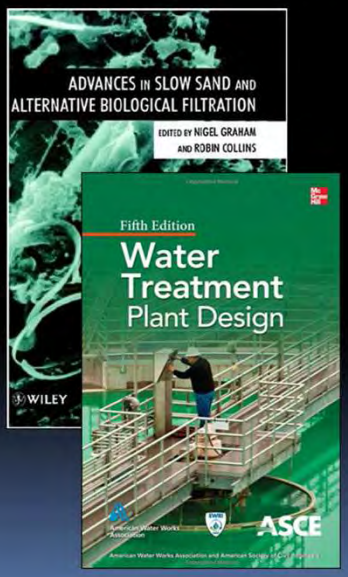

David Hendricks



Gary S. Logsdon, P.E.

<= Dr. Robin Collins

INPUT FROM EXPERIENCED STATE STAFF
Slow Sand Filtration
Optimization Workshop
Region 10 AWOP
Steve Tanner
DEQ CDA Regional Office
March 3, 2010
Portland, Oregon
Stephen Tanner, Idaho DEQ
Stephen Baker
Washington
DOH

OPERATIONAL GUIDELINES

Operational Guidelines for Normal Operation
Operate slow sand filters continuously without filter effluent flow rate changes. If filter effluent flow changes are needed, ensure that the flow changes are made gradually to minimize detachment of particles from the sand with no more than a 50% variation in flow in a 24-hr period. Use filter effluent flow controls to accommodate changes in system demands (e.g., set the filtration rate high enough to meet anticipated peak day demands and divert excess water to waste or filter headwater influent during low demand periods). Intermittent operation of slow sand filters should not be used as a means of rate control.
Influent flows should be monitored to prevent scouring of the sand bed and filter walls.
Ensure filter effluent rates (Hydraulic Loading Rates, or HLR) of between 0.03 - 0.10 gpm/ft^2 (0.07 – 0.24 m/hr). Filtration rates may need to be lowered should raw water quality deteriorate with lower temperatures. A flow rate of 0.05 gpm/ft^2 may be used with water temperatures less than 5°C.
In order to prevent air binding within the filter, the tail water elevation must always be maintained at or above the level of the sand bed. Filtration rates and effluent weir levels should be routinely checked and adjusted only if needed.

Operational guidelines stress the importance of flow control to ensure continuous operation of between 0.03 – 0.10 gpm/ft2, with minimal flow changes (e.g., weekly, as opposed to multiple times a day).

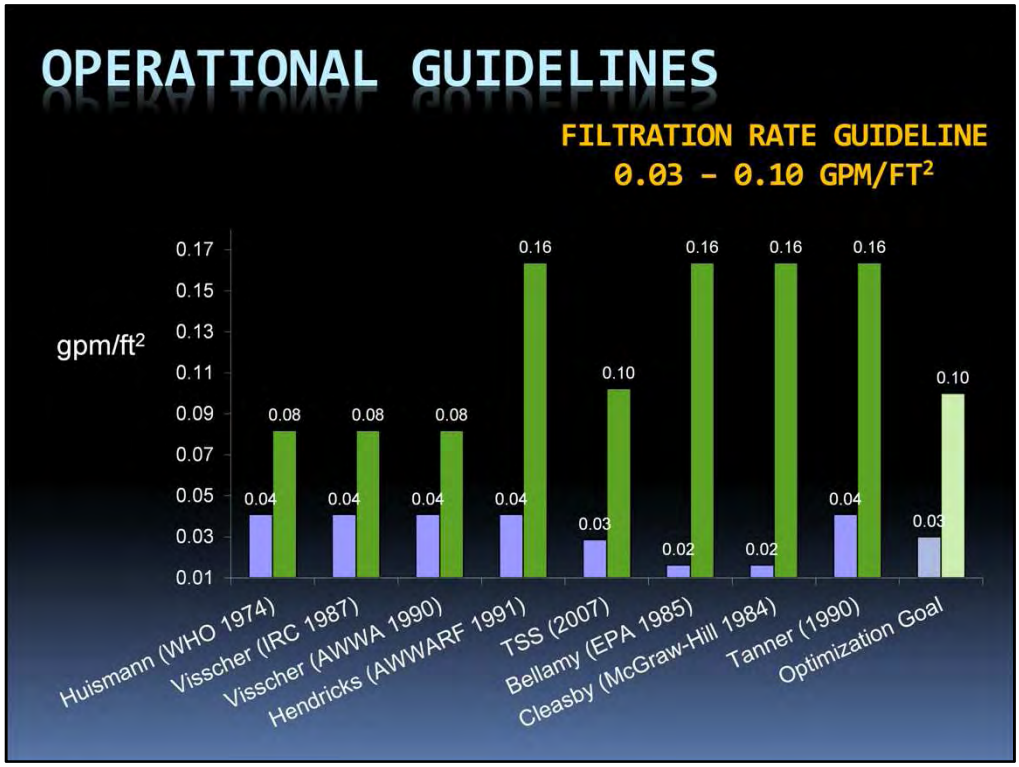

This graph shows the filtration rate goals at the far right as compared to filtration rates recommended by various sources.

WATER QUALITY GOALS

Optimization Goals for Normal Operating Conditions
IFE & CFE Turbidity ≤ 1.0 NTU in 95% of the highest daily readings measured at least once daily.
IFE & CFE Turbidity ≤ 5.0 NTU measured at least once daily.
IFE Total Coliform ≤ 10/100 ml measured at least weekly.
Water entering the distribution system is absent of total coliform bacteria (measure weekly when IFE or CFE turbidity > 1 NTU.

IFE = Individual Filter Effluent
CFE = Combined Filter Effluent
NTU = Nephelometric Turbidity Units
TC = Total Coliform, MPN or CFU per Standard Methods

Turbidity is not necessarily a good indicator of performance, since fine colloids may pass causing turbidity spikes that do not necessarily indicate deficiencies in pathogen removal, the turbidity "goal" was set no less stringent than the regulatory requirement. Coliform removal, however, is a good indicator of performance, since it better reflects the biological mechanisms at work in slow sand filters. A total coliform goal of less than or equal to 10 colony forming units (or MPN) per 100 ml of water at the effluent of each filter was established. Water entering the distribution system, after disinfection, should also be absent of total coliforms and should be monitored at least weekly with IFE or CFE turbidity is greater than 1 NTU.

This graph from data obtained from the City of Salem illustrates that turbidity can be maintained at very low levels, well within the regulatory limit of 1 NTU.

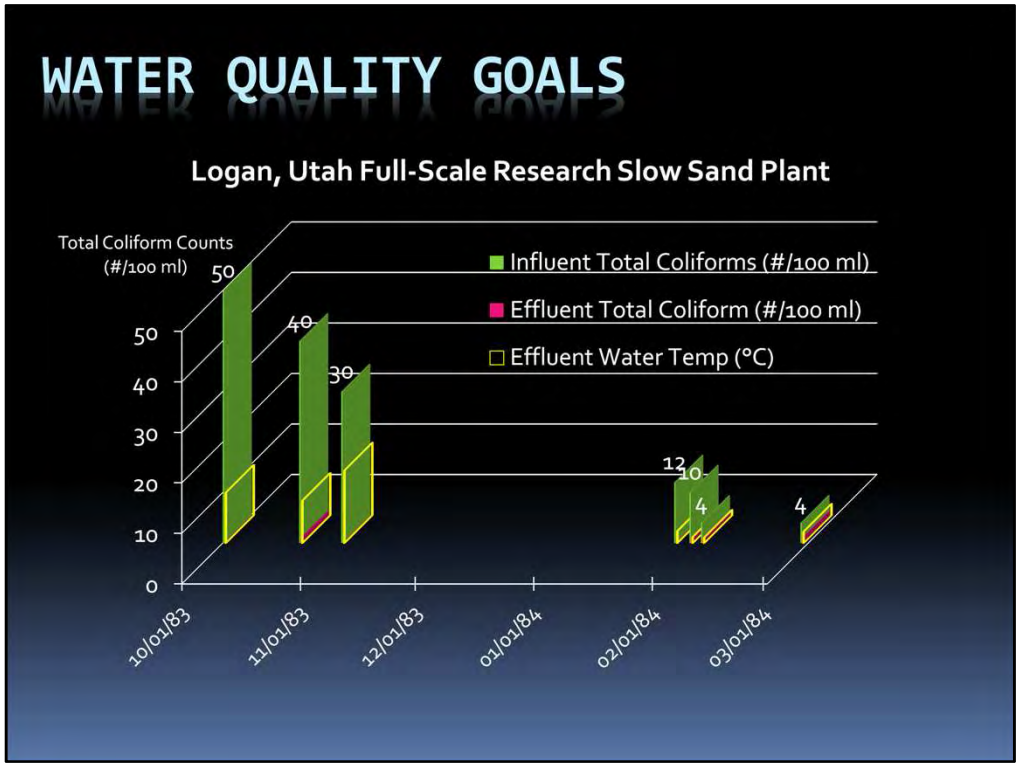

This graph is data obtained from a full-scale research slow sand plant in Logan, Utah. The data shows how coliform removal is effective, even with colder temperatures.

FILTER SCRAPING GUIDELINES

Operational Guidelines for Cleaning - Scraping
Scraping should be done when: 1. Headwater depth reaches the headwater overflow level; 2. The achievable filter production rate decreases to 0.03 gpm/ft^2 (0.073 m/hr); or 3. Daily demands are anticipated to not be met.
When removing a filter from service for cleaning, schedule the event to avoid overloading the remaining filters.
Minimize the time the filter is off-line.
Do not de-water the filter more than necessary in order to safely clean the filter (e.g. 2-12 inches below the sand surface).

Filter scraping guidelines stress minimizing down-time and the amount of the sand bed that is allowed to be de-watered.

FILTER SCRAPING GUIDELINES CONTINUED

Operational Guidelines for Cleaning - Scraping

Remove the schmutzdecke and no more than ¼ - ½ inch (0.635 – 1.27 cm) of sand with each cleaning. Depending upon the effective size (d10) and applied water quality, more sand may need to be scraped (1/2" – 1") in order to remove the plugged portion of the filter, allowing clean bed headloss to recover. Operators should monitor headloss before and after each scraping in order to determine how much sand is needed to be removed to maximize filter recovery while avoiding excessive sand removal. Monitoring headloss development by plotting daily headloss readings for each filter should be used to schedule filter cleanings during times of low demands and higher applied water temperatures (above 5°C). Scheduling cleanings during low system demands will help ensure that demands are able to be met without overloading adjacent filters. Scheduling cleanings during times of warmer water temperature will help minimize the adverse affects of cold temperatures on the filter biota. The minimum permissible sand bed depth should be no less than 20-24 inches.

Scraping should minimize how much sand is removed, which may be dictated by the raw water characteristics. Scraping should be scheduled during low demand times to avoid having to increase flows through the remaining filters. Colder temperatures should also be avoided as this can increase ripening time.

FILTER SCRAPING GUIDELINES CONTINUED

Operational Guidelines for Cleaning - Scraping
Avoid walking or driving directly on the schmutzdecke during cleaning.
After the filter has been cleaned, slowly refill the filter from the bottom at a rate of 0.3-0.6 ft of bed depth per hour (0.1 – 0.18 m/hr or 0.0374 – 0.0748 gpm/ft^2) in order to purge entrained air. Refill with non-chlorinated filtered water from one of the other filters until the headwater is 1-ft above the sand to minimize scouring of the sand bed when filling from the top begins. Then fill from the top at a rate that minimizes disturbing the sand bed. *Note: To convert ft/hr to gpm/ft^2, multiply (ft/hr)by (1 hr/60 min) and then multiply by (7.48 gal/ft^3). Example: 0.3 ft/hr x (1 hr/60 min) x (7.48 gallons/ft^3) = 0.0374 gpm/ft^2.*
Begin filtering to waste at the same rate as was used prior to cleaning, or at the anticipated rate needed when the filter is brought back on-line. Do not exceed the design flow rate and keep the rate $\leq$ 0.1 gpm/ft^2.
Filter to waste for each hour that the filter is off-line, but no less than 24 hours. Filter to waste until the optimization goals following filter cleaning have been met.

Scraping guidelines also recommend a minimal amount of sand be removed with each scraping in order to prolong the life of the filter. Scraping should be undertaken in such a way as to avoid treading on or driving machinery on parts of the sand bed that have not yet been scraped. Once cleaned, filtered water from an adjacent filter should be introduced from the bottom at a rate of roughly 0.3 – 0.6 ft/hr in order to purge entrained air out of the de-watered portion of the sand bed. This helps avoid air entrainment. Water should flow up through the filter until the headwater reaches about 1-ft above the sand bed. Having this amount of water minimizes sand scour when raw water is re-introduced from the top. Raw water can then be introduced and the filter can begin filtering to waste at a rate less than 0.1 gpm/ft2. The filters should be filtered to waste at this rate for no less than 24 hrs at which time a coliform sample should be collected to determine the total coliform count. The filter can be returned to service when the coliform counts are less than 10 CFU or MPN /100 ml and when turbidity drops to 1 NTU or less.

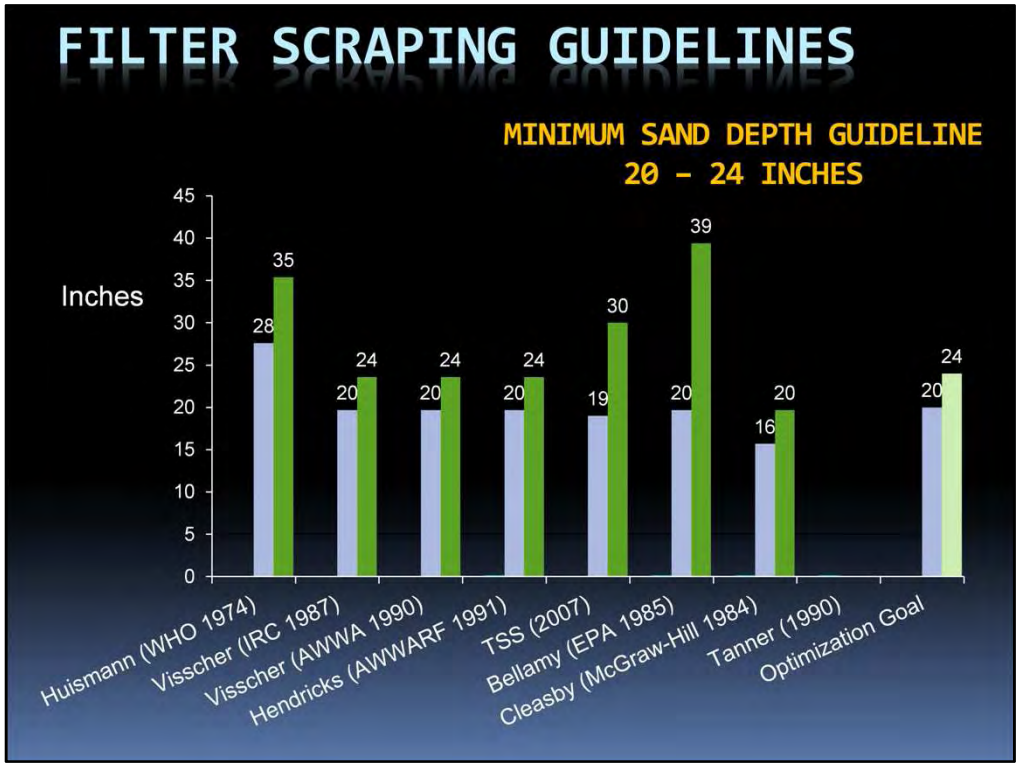
FILTER SCRAPING GUIDELINES
MINIMUM SAND DEPTH GUIDELINE
20 – 24 INCHES
Inches
45
40
35
30
25
20
15
10
5
0
28
35
20
24
20
24
20
24
19
30
20
39
16
20
20
24
Huismann (WHO 1974)
Visscher (IRC 1987)
Visscher (AWWA 1990)
Hendricks (AWWARF 1991)
TSS (2007)
Bellamy (EPA 1985)
Cleasby (McGraw-Hill 1984)
Tanner (1990)
Optimization Goal

FILTER HARROWING GUIDELINES

Operational Guidelines for Cleaning - Harrowing
Lower water level to the level of the harrowing waste valve (~ 6" above the sand bed). This is done to keep the head pressure low in order to minimize migration of debris down into the filter during the raking process.
Open the harrowing waste valve and begin introducing filtered unchlorinated water from the bottom of the filter at a rate of 0.16 ft/hr (0.02 gpm/ft^2) and low enough to prevent the sand from being fluidized. This serves to keep debris from being driven into the filter bed during raking.
Introduce water into the top of the filter at a rate low enough to prevent sand migration, but high enough to flush the debris to waste during raking. For rectangular filters, a typical flow rate of about 20 gpm times the depth of water above the sand during harrowing times the length of the filter that is perpendicular to the incoming flow will for. For example, 1,000 gpm will work with 6 inches of water depth in a 100-ft wide filter provided the flow path is directed across the width of the filter. For other filters, influent flow should be adjusted to maintain a steady water level above the sand during raking. In either case, it is important to maintain a constant water level above the sand throughout the harrowing process by balancing flows into and out of the filter.
Using a stiff tined rake or harrowing equipment, gently agitate the top 2-3" (5-8 cm) of sand until the headwater begins to clarify, as indicated by the ability to see the sand bed when raking is stopped.

FILTER HARROWING GUIDELINES

Operational Guidelines for Cleaning - Harrowing

After it has been cleaned, slowly refill the filter from the bottom at a rate of 0.3 – 0.6 ft of rise per hour (0.1 – 0.18 m/hr or 0.0374 – 0.0748 gpm/ft^2) in order to purge entrained air. Refill with non-chlorinated filtered water from one of the other filters until the headwater is 1-ft above the sand to minimize scouring of the sand bed when filling from the top begins. Then fill from the top at a rate that minimizes disturbing the sand bed.

Note: To convert ft/hr to gpm/ft^2, multiply (ft/hr)by (1 hr/60 min) and then multiply by (7.48 gal/ft^3).
Example: 0.3 ft/hr x (1 hr/60 min) x (7.48 gallons/ft^3) = 0.0374 gpm/ft^2

Begin filtering to waste at the same rate as was used prior to cleaning, or at the anticipated rate needed when the filter is brought back on-line. Do not exceed the design flow rate and keep the rate $\leq$ 0.1 gpm/ft^2.

Filter to waste for each hour that the filter is off-line, but no less than 24 hours. Filter to waste until the optimization goals following filter cleaning have been met.

FILTER RIPENING GUIDELINES

Optimization Goals Following Filter Cleaning (scraping or harrowing)
Filter to waste for each hour that the filter is off-line, but no less than 24 hours, until sampling demonstrates that the goals below have been met.
Filter not to be brought on-line until: 1) IFE Total Coliform ≤ 10 MPN or CFU /100 ml (sample no earlier than 24 hours after the start of filtering to waste) 2) IFE Turbidity ≤ 1.0 NTU

IFE = Individual Filter Effluent
CFE = Combined Filter Effluent
NTU = Nephelometric Turbidity Units
TC = Total Coliform, MPN or CFU per Standard Methods

This table summarizes the coliform and turbidity levels used to indicate when the filter has had sufficient time to ripen.

FILTER RIPENING GUIDELINES, CONTINUED

Optimization Goals Following Filter Cleaning (scraping or harrowing)

Performance of the newly cleaned filter (e.g., turbidity effluent and/or filter effluent coliform counts if available) should be compared to the other filters that have remained in service or to the performance of the cleaned filter prior to cleaning. If there is considerable difference in the performance of the newly cleaned filter, the operator should consider extending the filter to waste period.

Filtration rates may need to be lowered should raw water quality deteriorate with lower temperatures. A flow rate of 0.05 gpm/ft^2 may be used with water temperatures less than 5°C. Filter cleanings should generally be scheduled to avoid months where water temperatures are expected to regularly drop below 5°C.

This table summarizes the coliform and turbidity levels used to indicate when the filter has had sufficient time to ripen.

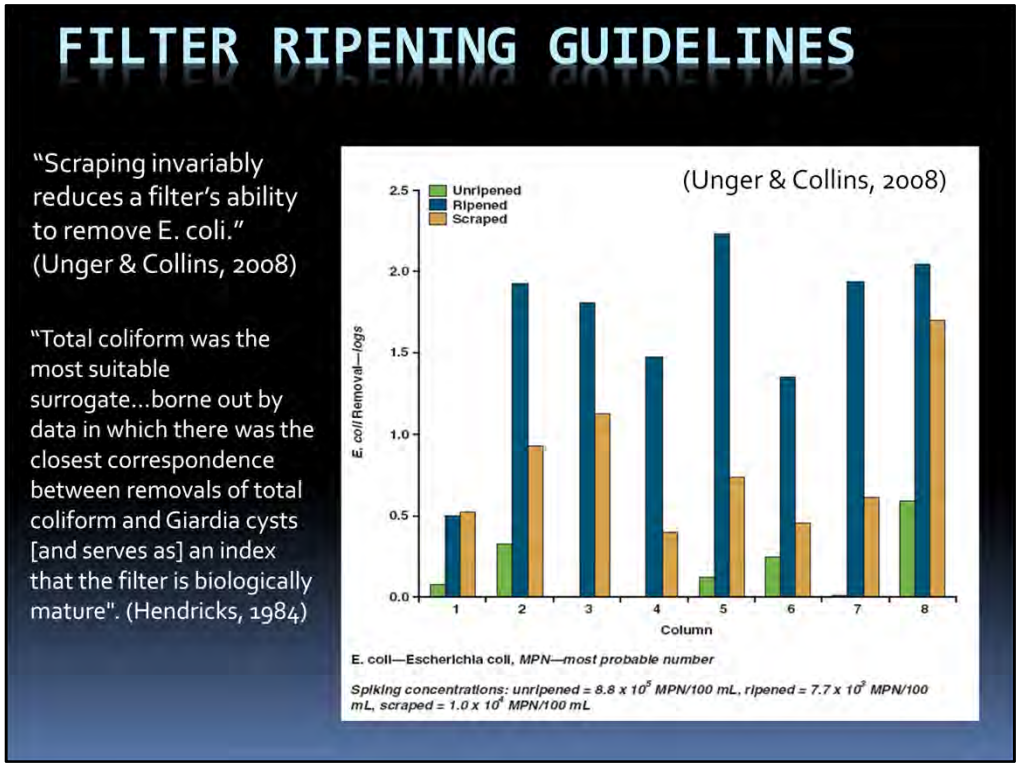

Data has shown that scraping does have an impact on coliform removal, which has also been correlated to the removal of Giardia cysts.

RECOMMENDED MEDIA SPECS FOR RE-SANDING

Media specifications (silica sand)

Filter Sand Specification	Recommended Range
Effective Diameter (d10)	0.2 – 0.35 mm
Uniformity Coefficient (U)	1.5 – 3.0
% fines passing #200 sieve	< 0.3% by Wt.
Acid Solubility	< 5%
Apparent Specific Gravity	≥ 2.55
Minimum Depth	20-24 inches
Delivery/Installation	Sand should be washed prior to installation

This table summarizes some of the main specifications for sand and bed depth when re-sanding becomes necessary.

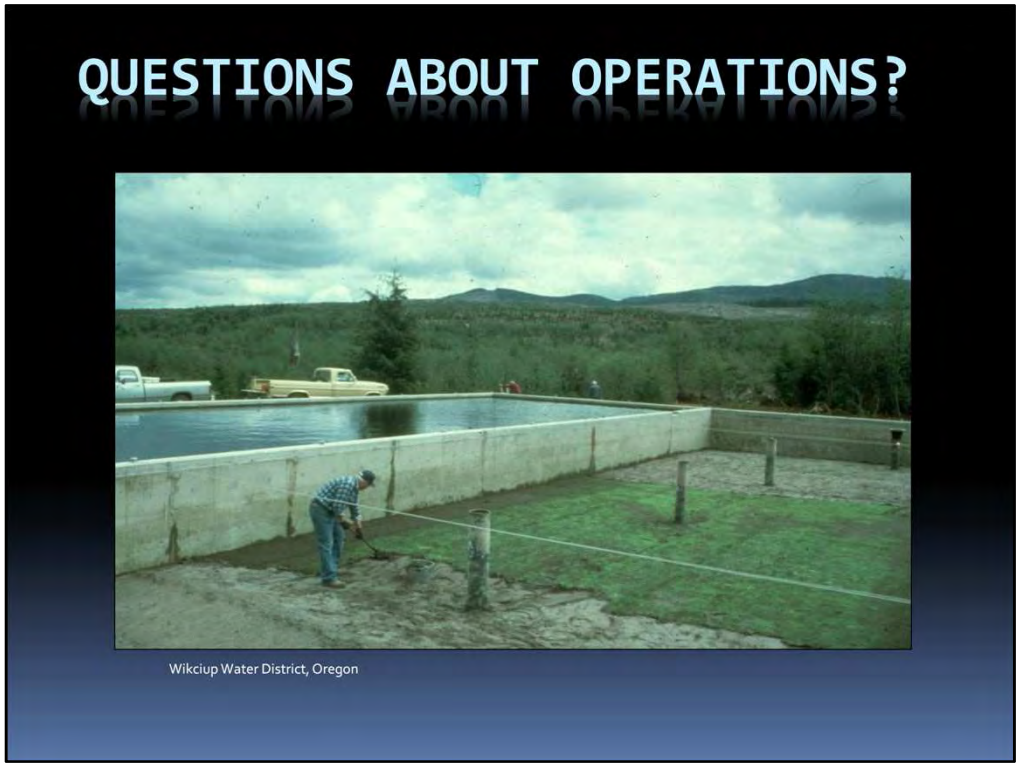

Photo is of cleaning in progress at the Wickiup Water District, Oregon.